




CFM12S Series

Application Note V16

AC-DC Switching Power Module CFM12S Series APPLICATION NOTE

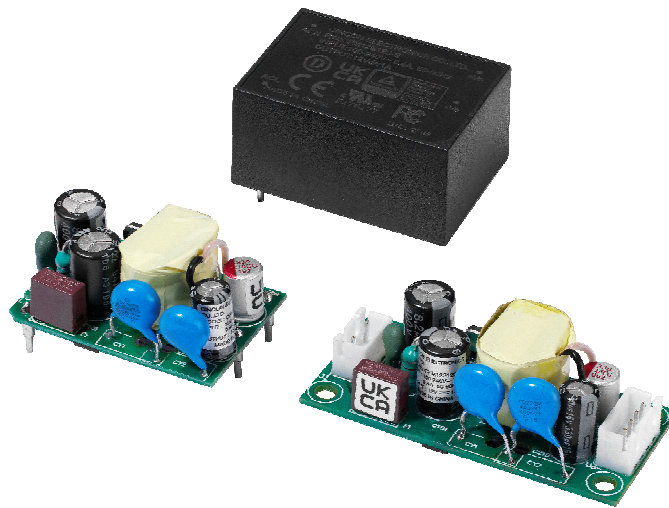

Approved By:

Department	Approved By	Checked By	Written By
Research and Development Department	Ovid	Yang/Su Shih Hang	Joyce
Design Quality Department	Benny	JoJo	



CFM12S Series

Application Note V16

Content

1. INTRODUCTION	3
2. ELECTRICAL BLOCK DIAGRAM	3
3. MAIN FEATURES AND FUNCTIONS	4
3.1 <i>Operating Temperature Range</i>	4
3.2 <i>Output Protection</i>	4
4. APPLICATIONS	4
4.1 <i>Test Set-Up</i>	4
4.2 <i>Output Ripple and Noise Measurement</i>	4
4.3 <i>Installation Instruction</i>	5
5. PACKING INFORMATION	6




CFM12S Series

Application Note V16

1. Introduction

This application note describes the features and functions of Cincon's CFM12S series of open frame, switching AC-DC power module. These are highly efficient, reliable, compact, high power density, single output AC/DC power modules. The module is fully protected against short circuit and over-voltage conditions. Cincon's world class automated manufacturing methods, together with an extensive testing and qualification program, ensure that the CFM12S series power module is extremely reliable.

2. Electrical Block Diagram

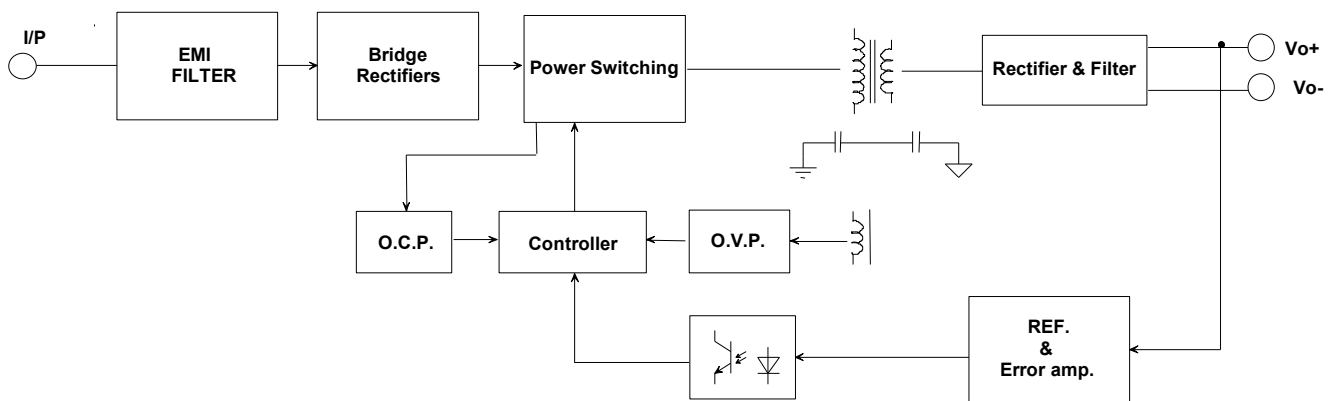



CFM12S Series

Application Note V16

3. Main Features and Functions

3.1 Operating Temperature Range

The highly efficient design of Cincon's CFM12S series power modules has resulted in their ability to operate within ambient temperature environments from -40°C to 75°C. Due consideration must be given to the de-rating curves when ascertaining the maximum power that can be drawn from the module. The maximum power which can be drawn is influenced by a number of factors, such as:

- Input voltage range
- Permissible output load (per derating curve)

3.2 Output Protection

The power modules provide full continuous short-circuit protection. The unit will auto recover once the short circuit is removed. To provide protection in a fault condition, the unit is equipped with internal over-current protection. The unit will operate normally once the fault condition is removed. The power module will go to hiccup mode if the output current is set from 110% to 180% of rated current.

4. Applications

4.1 Test Set-Up

The basic test set-up to measure parameters such as efficiency and load regulation is shown in Figure 1. When testing the Cincon's CFM12S series under any transient conditions, please ensure that the transient response of the source is sufficient to power the equipment under test. We can calculate the

- Efficiency
- Load regulation and line regulation

The value of efficiency is defined as:

$$\eta = \frac{V_o \times I_o}{P_{in}} \times 100\%$$

Where:

- Vo is output voltage
- Io is output current
- Pin is input power

The value of load regulation is defined as:

$$Load\ reg. = \frac{V_{FL} - V_{NL}}{V_{NL}} \times 100\%$$

Where:

V_{FL} is the output voltage at 100% full load

V_{NL} is the output voltage at 10% load

The value of line regulation is defined as:

$$Line\ reg. = \frac{V_{HL} - V_{LL}}{V_{LL}} \times 100\%$$

Where:

V_{HL} is the output voltage of maximum input voltage at 100% full load

V_{LL} is the output voltage of minimum input voltage at 100% full load.

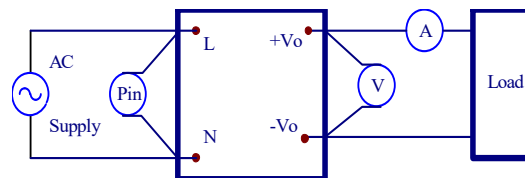


Figure 1. CFM12S Series Test Setup

4.2 Output Ripple and Noise Measurement

The test set-up for noise and ripple measurements is shown in Figure 2 Measured method:

Add a C2=0.1 uF ceramic capacitor and a C1=10 uF electrolytic capacitor to output at 20 MHz Band Width.

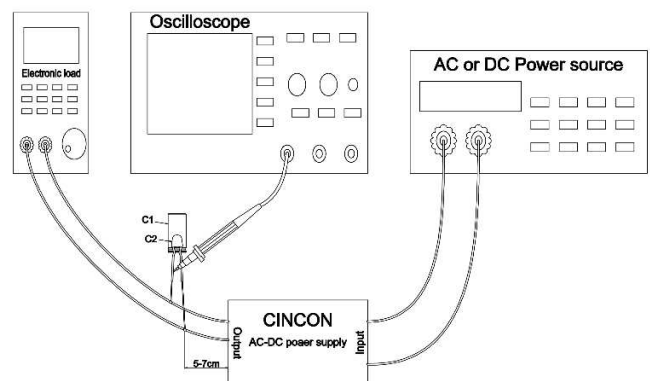


Figure 2. Output Voltage Ripple and Noise Measurement Set-Up





CFM12S Series


Application Note V16

4.3 Installation Instruction

The CFM12SXXX-T has four 3.5mm diameter mounting holes. Please use the mounting holes as follows: Insert the spacer (6mm diameter max.) of 8mm height or more to mount the unit. The vibration specification applies when the unit is mounted on 8mm spacers. Please allow 4mm side clearance from the components and all side of the PCB. Allow 5mm clearance above the highest parts on the PCB. Be especially careful to allow 8mm between the solder side of the PCB and the mounting surface. If the clearances are not sufficient, the specifications for isolation and withstand will not be valid.

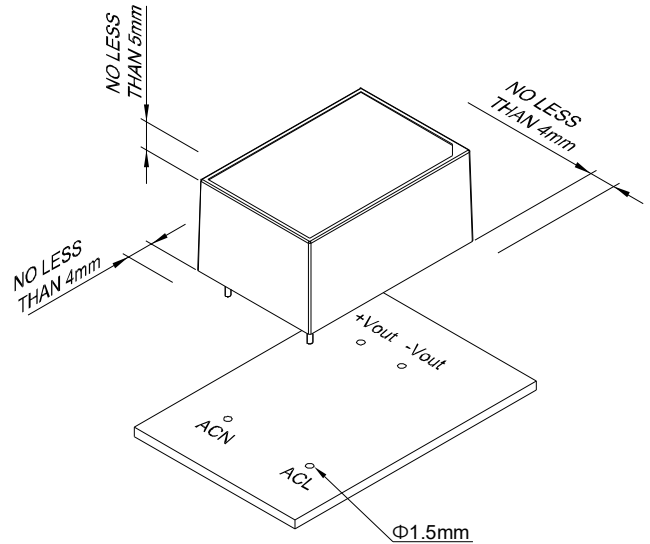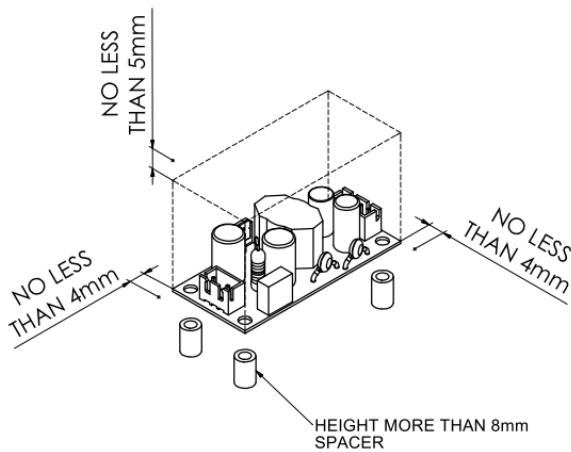

The CFM12SXXX and CFM12SXXX-E mounting holes are 1.5mm. Please allow 4mm side clearance from the components and all side of the PCB and CASE. Allow 5mm clearance above the highest parts on the PCB and CASE.

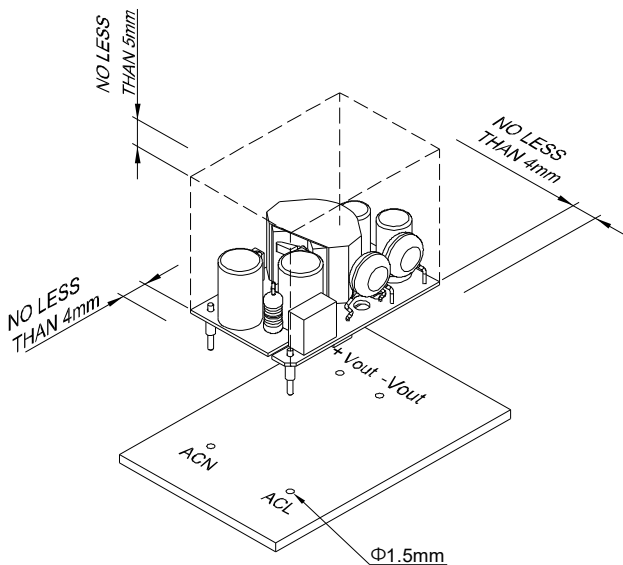




CFM12S Series


Application Note V16

5. Packing Information

The packing information for CFM12SXXX series is showing as follows:

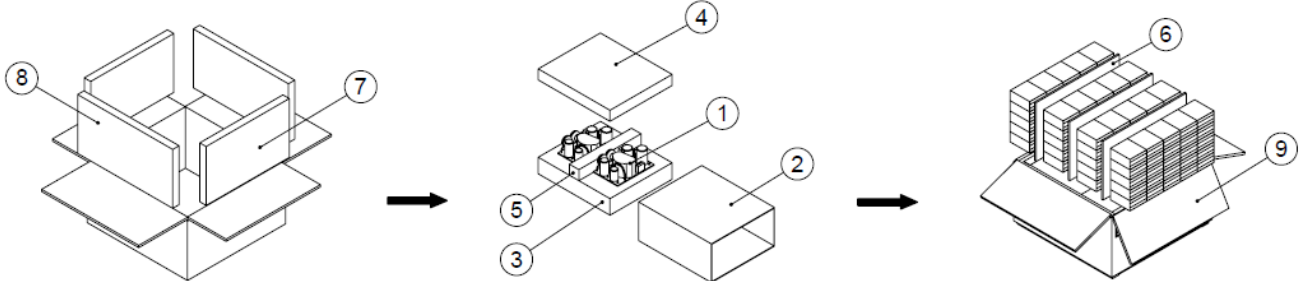

ITEM	PART NO.	NAME	OUTSIDE DIM	PCS
1	-	CFM12SXXX Product	38.1x25.4x19.2mm	200
2	G64304163	Inner Box	76x66x35 mm	100
3	G64301177	Antistatic Foam	75x65x15 mm	100
4	G64308311	Antistatic Foam	75x65x10 mm	100
5	G64301178	Antistatic Foam	65x10x10 mm	100
6	G64U10075	Partition	326x200x6 mm	3
7	G64301114	Antistatic Foam	326x200x25 mm	2
8	G64301113	Antistatic Foam	373x200x25 mm	2
9	G64114346	No.148 Cardboard Box	393x385x220mm	1




Each Box Packaging 200PCS Products
Gross weight Ref. 4.5kg

CFM12SXXX 200pcs a box, including the total weight of package material about 4.5Kg

The packing information for CFM12SXXX-E series is showing as follows:

Packaging 17PCS Products
in the Antistatic PVC Tube

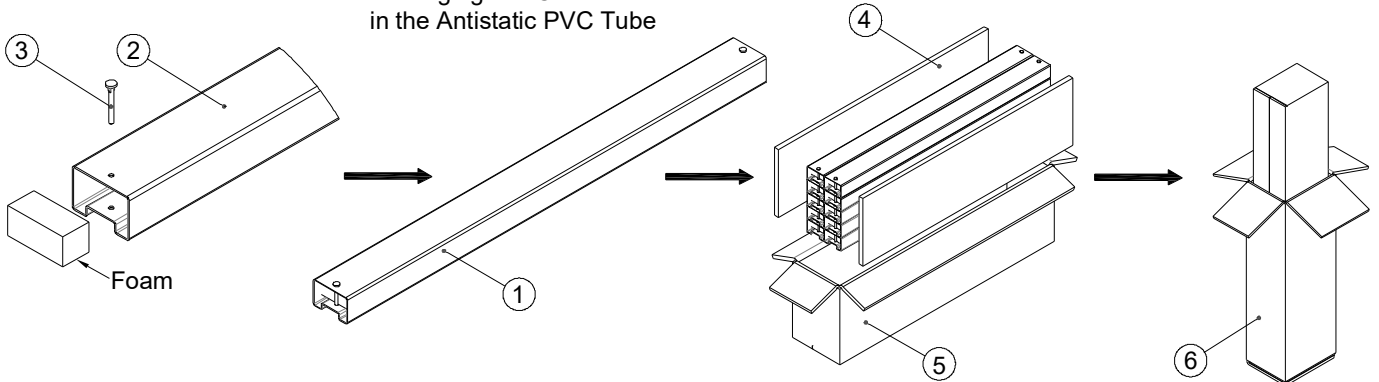

ITEM	PART NO.	NAME	OUTSIDE DIM(mm)	PCS
1	-	CFM12SXXX-E Product	40.64*27.94*19.6	170
2	G64910942	Antistatic PVC Tube	43.6*29.1*535	10
3	-	Tube Nail	-	20
4	G64301154	Antistatic Foam	535*150*10	2
5	G64203214	No.14 Inner Cardboard Box	548.4*121.2*166.7	1
6	G64112338	No.14 Cardboard Box	590.9*148.5*193.9	1

Each Box Packaging 170PCS Products
Gross weight Ref. 9.0Kg


CFM12SXXX-E 170pcs a box, including the total weight of package material about 9.0Kg




CFM12S Series

Application Note V16

The packing information for CFM12SXXX-T series is showing as follows:

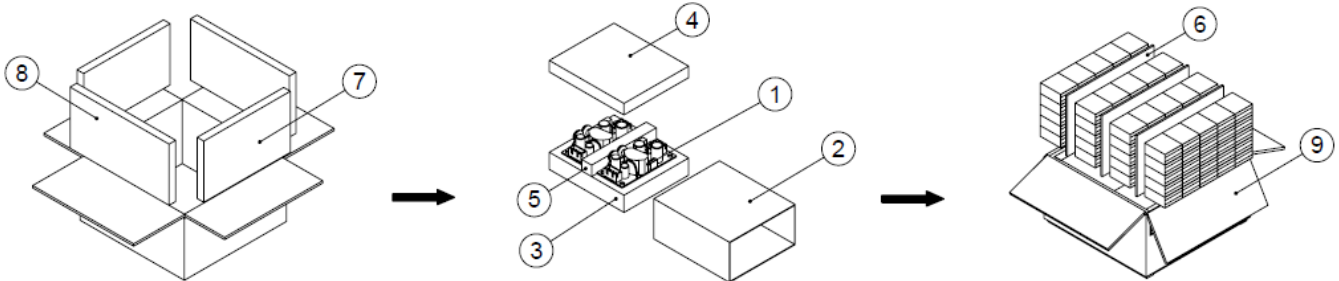

ITEM	PART NO.	NAME	OUTSIDE DIM	PCS
1	-	CFM12SXXX-T Product	54.6x25.4x17.5mm	200
2	G64304163	Inner Box	76x66x35 mm	100
3	G64301177	Antistatic Foam	75x65x15 mm	100
4	G64308311	Antistatic Foam	75x65x10 mm	100
5	G64301178	Antistatic Foam	65x10x10 mm	100
6	G64U10075	Partition	326x200x6 mm	3
7	G64301114	Antistatic Foam	326x200x25 mm	2
8	G64301113	Antistatic Foam	373x200x25 mm	2
9	G64114346	No.148 Cardboard Box	393x385x220mm	1



Each Box Packaging 200PCS Products

Gross weight Ref. 4.5Kg

CFM12SXXX-T 200pcs a box, including the total weight of package material about 4.5Kg

Headquarters:

14F, No.306, Sec.4, Hsin Yi Rd.
 Taipei, Taiwan
 Tel: 886-2-27086210
 Fax: 886-2-27029852
 E-mail: sales@cincon.com.tw
 Web Site: <https://www.cincon.com>

CINCON ELECTRONICS CO., LTD.

Factory:

No. 8-1, Fu Kung Rd.
 Fu Hsing Industrial Park
 Fu Hsing Hsiang,
 Chang Hua Hsien, Taiwan
 Tel: 886-4-7690261
 Fax: 886-4-7698031

Cincon North America:

1655 Mesa Verde Ave. Ste 180
 Ventura, CA 93003
 Tel: 805-639-3350
 Fax: 805-639-4101
 E-mail: info@cincon.com