



# CFM61S SERIES 60 WATT OPEN FRAME AC-DC MODULES

## Features

- Universal Input Range 90~264Vac
- High Efficiency up to 90%
- 2"x 2" Compact Size
- Class II
- No Load Input Power Consumption < 0.15W
- Approved IEC/EN/UL 62368-1 Ed 3.0
- Approved EN 55032 and CISPR/FCC Class B
- Continuous Short Circuit Protection
- Over Voltage Protection
- Peak Load (2 Times of Rated Current (Note7))



| MODEL NUMBER | OUTPUT VOLTAGE | OUTPUT CURRENT | VOLTAGE ACCURACY NOTE1 | RIPPLE & NOISE NOTE2 | LINE REGULATION NOTE3 | LOAD REGULATION NOTE4 | %EFF. (Typ.) NOTE5 |
|--------------|----------------|----------------|------------------------|----------------------|-----------------------|-----------------------|--------------------|
| CFM61S050    | 5 V            | 8 A            | 2%                     | 50 mV                | ±1%                   | ±1%                   | 86%                |
| CFM61S120    | 12 V           | 5 A            | 1%                     | 120 mV               | ±1%                   | ±1%                   | 88%                |
| CFM61S150    | 15 V           | 4 A            | 1%                     | 150 mV               | ±1%                   | ±1%                   | 88%                |
| CFM61S240    | 24 V           | 2.5 A          | 1%                     | 240 mV               | ±1%                   | ±1%                   | 89%                |
| CFM61S360    | 36 V           | 1.67 A         | 1%                     | 360 mV               | ±1%                   | ±1%                   | 89%                |
| CFM61S480    | 48 V           | 1.25A          | 1%                     | 480 mV               | ±1%                   | ±1%                   | 90%                |

Note:

1. Voltage accuracy is set at 100% full load.
2. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple & noise measuring @20MHz BW.  
(CFM61S050: Add a 0.1uF ceramic capacitor and a 47uF E.L. capacitor to output for ripple & noise measuring @20MHz BW.)
3. Line regulation is measured from 0V<sub>ac</sub> to 264V<sub>ac</sub> with 100% full load.
4. Load regulation measured from 10% to 100% full load.
5. Typical efficiency at 230 Vac and 75% full load at 25°C.
6. Standard input and output connectors (CN1 and CN2) wafer with TAIWAN KING PIN TERMINAL PVHI series and mate with JST housing VHR series or equivalent.
7. PL (Peak load function) Lasting time < 10 seconds with a maximum 10%.  
Duty cycle and must add external 100uF / 400V capacitor to BC+ & BC-.

## PART NUMBER

| Series | Number of Outputs | Nominal Output Voltage  | Type   | Type                             |
|--------|-------------------|---|--|----------------------------------|
| CFM61  | O                 | XXX   | X  | YZ (Option)                      |
| CFM61  | S : Single        | 050 : 5V<br>120 : 12V<br>150 : 15V<br>240 : 24V<br>360 : 36V<br>480 : 48V | Blank : PCB Mount<br>E : Encapsulated<br>T : Wafer | Blank<br>PL : Peak Load Function |

Part Number Example:

- CFM61S120-E:** Encapsulated, Single 12Vdc Output
- CFM61S120-E PL:** Encapsulated, With PL, Single 12Vdc Output



# CFM61S Series

## TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

### ABSOLUTE MAXIMUM RATINGS

| PARAMETER             | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units           |
|-----------------------|----------------------|--------|------|------|------|-----------------|
| Input Voltage         |                      | All    | 90   |      | 264  | V <sub>ac</sub> |
|                       |                      |        | 120  |      | 370  | V <sub>dc</sub> |
| Operating Temperature | See Derating Curve   | All    | -30  |      | 80   | °C              |
| Storage Temperature   |                      | All    | -30  |      | 85   | °C              |
| Operating Altitude    |                      | All    |      |      | 5000 | m               |

### INPUT CHARACTERISTICS

| PARAMETER               | NOTES and CONDITIONS                                   | Device | Min. | Typ. | Max. | Units           |
|-------------------------|--|--------|------|------|------|-----------------|
| Operating Voltage Range |  | All    | 100  |      | 240  | V <sub>ac</sub> |
| Input Frequency Range   |  | All    | 47   |      | 63   | Hz              |
| Maximum Input Current   | 100% Load, V <sub>in</sub> =100V <sub>ac</sub>         | All    |      |      | 1.5  | A               |
| Inrush Current          | V <sub>in</sub> =240V <sub>ac</sub> , Cold Start @25°C | All    |      |      | 120  | A               |
| Leakage Current (Touch) |  | All    |      |      | 0.25 | mA              |

### OUTPUT CHARACTERISTICS

| PARAMETER                      | NOTES and CONDITIONS   | Device    | Min.  | Typ. | Max.  | Units           |
|--------------------------------|--|-----------|-------|------|-------|-----------------|
| Output Voltage Set Point       | V <sub>in</sub> =90V <sub>ac</sub> ~264V <sub>ac</sub> , I <sub>o</sub> =I <sub>o</sub> max, ambient temperature=25°C.   | CFM61S050 | 4.9   | 5    | 5.1   | V <sub>dc</sub> |
|                                |  | CFM61S120 | 11.88 | 12   | 12.12 |                 |
|                                |  | CFM61S150 | 14.85 | 15   | 15.15 |                 |
|                                |  | CFM61S240 | 23.76 | 24   | 24.24 |                 |
|                                |  | CFM61S360 | 35.64 | 36   | 36.36 |                 |
|                                |  | CFM61S480 | 47.52 | 48   | 48.48 |                 |
| Operating Output Current Range | V <sub>in</sub> =90V <sub>ac</sub> ~264V <sub>ac</sub> , See Derating Curve  | CFM61S050 | 0     |      | 8     | A               |
|                                |  | CFM61S120 | 0     |      | 5     |                 |
|                                |  | CFM61S150 | 0     |      | 4     |                 |
|                                |  | CFM61S240 | 0     |      | 2.5   |                 |
|                                |  | CFM61S360 | 0     |      | 1.67  |                 |
|                                |  | CFM61S480 | 0     |      | 1.25  |                 |
| Holdup Time                    | V <sub>in</sub> =115V <sub>ac</sub>  | All       |       | 10   |       | ms              |
| Output Voltage Regulation      |  |           |       |      |       |                 |
| Load Regulation                | 10% Load to full load  | All       |       |      | ±1.0  | %               |
| Line Regulation                | V <sub>in</sub> =High line to low line   | All       |       |      | ±1.0  | %               |
| Over Voltage Protection        | Clamp output voltage   | CFM61S050 |       | 6.8  |       | V <sub>dc</sub> |
|                                |  | CFM61S120 |       | 15   |       |                 |
|                                |  | CFM61S150 |       | 18   |       |                 |
|                                |  | CFM61S240 |       | 30   |       |                 |
|                                |  | CFM61S360 |       | 47   |       |                 |
|                                |  | CFM61S480 |       | 56   |       |                 |
| Output Ripple and Noise        | 1. Add a 0.1uF ceramic capacitor and a 10uF aluminum electrolytic capacitor to output. (CFM61S050: Add a 0.1uF ceramic capacitor and 47uF aluminum electrolytic capacitor to output.)<br>2. Oscilloscope is 20MHz band width.<br>3. Ambient temperature=25°C | CFM61S050 |       |      | 50    | mV              |
|                                |  | CFM61S120 |       |      | 120   |                 |
|                                |  | CFM61S150 |       |      | 150   |                 |
|                                |  | CFM61S240 |       |      | 240   |                 |
|                                |  | CFM61S360 |       |      | 360   |                 |
|                                |  | CFM61S480 |       |      | 480   |                 |



# CFM61S Series

| PARAMETER                | NOTES and CONDITIONS  | Device   | Min. | Typ.                             | Max.  | Units |
|--------------------------|---|--|------|----------------------------------|---|-------|
| Short Circuit Protection | Auto recovery   | All  |      |                                  |   |       |
| Load Capacitance         | 1. Input voltage is 115V <sub>ac</sub> and 230V <sub>ac</sub><br>2. Output is 100% full load<br>3. Ambient temperature=25°C | CFM61S050<br>CFM61S120<br>CFM61S150<br>CFM61S240<br>CFM61S360<br>CFM61S480 |      |                                  | 8000<br>5000<br>4000<br>2400<br>1680<br>680 | uF    |
| Efficiency               | 1. Input voltage is 230V <sub>ac</sub> .<br>2. Output is 75% full load<br>3. Ambient temperature=25°C                       | CFM61S050<br>CFM61S120<br>CFM61S150<br>CFM61S240<br>CFM61S360<br>CFM61S480 |      | 86<br>88<br>88<br>89<br>89<br>90 |   | %     |

## ISOLATION CHARACTERISTICS

| PARAMETER            | NOTES and CONDITIONS                    | Device | Min. | Typ. | Max. | Units           |
|----------------------|---|--------|------|------|------|-----------------|
| Input to Output      | 1 Minute (without dielectric breakdown) | All    |      |      | 3000 | V <sub>ac</sub> |
| Isolation Resistance | Input to output                         | All    | 100  |      |      | MΩ              |

## FEATURE CHARACTERISTICS

| PARAMETER           | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units |
|---------------------|----------------------|--------|------|------|------|-------|
| Switching Frequency |                      | All    |      | 65   |      | kHz   |

## GENERAL CHARACTERISTICS

| PARAMETER                      | NOTES and CONDITIONS  | Device                                  | Min.   | Typ.            | Max. | Units       |
|--------------------------------|---|---|--|-----------------|------|-------------|
| MTBF                           | I <sub>o</sub> =100%; T <sub>a</sub> =25°C per MIL-HDBK-217F<br>I <sub>o</sub> =100%, T <sub>a</sub> =25°C, Telcordia SR332 | All                                     | 350<br>2900  |                 |      | k<br>hours  |
| Life Time                      | @75% Load, 40°C   | All                                     | 26   |                 |      | k<br>hours  |
| Humidity                       | Non-condensing  | All                                     |  |                 | 93   | % RH        |
| Shock                          | Meets MIL-STD-810F Table 516.5, TABLE 516.5- I 10ms, each axis 3 times(±X · ±Y · ±Z axis)                                   | All                                     |  | 75              |      | g           |
| Vibration                      | Meets MIL-STD-810F Table 514.5C-VIII, 15~2000Hz, X · Y · Z axis, 1 hr(each axis),. total 3 hrs                              | All                                     |  | 4               |      | g           |
| Weight                         |   | CFM61SXXX<br>CFM61SXXX-E<br>CFM61SXXX-T |  | 93<br>190<br>96 |      | grams       |
| Dimension                      |   | CFM61SXXX<br>CFM61SXXX-E<br>CFM61SXXX-T | 2.00x2.00x1.398 Inches<br>(50.80x50.80x35.50 mm)<br>2.136x2.136x1.409 Inches<br>(54.25x54.25x35.80 mm)<br>2.700x2.000x1.343 Inches<br>(68.58x50.80x34.10 mm) |                 |      |             |
| Safety                         | Class II, IEC/EN/UL 62368-1   |   |  |                 |      | Ed. 3.0     |
| EMC Emission                   | EN 55032, EN 61000-3-2, EN 6100-3-3, EN 61000-6-3, EN 61000-6-4, 47 CFR FCC Part 15 Subpart B, ICES-003 Issue 7             |   |  |                 |      | Class B     |
| Conducted Disturbance          | EN 55032:2015+A11:2020, EN 61000-6-3:2007+A1:2011+AC:2012, 47 CFR FCC Part 15 Subpart B                                     |   |  |                 |      | Class B     |
| Radiated Disturbance           | EN 55032:2015+A11:2020, EN 61000-6-3:2007+A1:2011+AC:2012, 47 CFR FCC Part 15 Subpart B                                     |   |  |                 |      | Class B     |
| Harmonic Current Emissions     | EN 61000-3-2:2019   |   |  |                 |      | Class A     |
| Voltage Fluctuations & Flicker | EN 61000-3-3:2013+A1:2019   |   |  |                 |      | Criterion A |
| EMC Immunity                   | EN 55035:2017+A11:2020, EN 61204-3:2000, EN 61000-6-1:2019, EN 61000-6-2:2019   |   |  |                 |      | Criterion A |
| Electrostatic Discharge (ESD)  | IEC 61000-4-2:2008, Air discharge: ±8kV, Contact discharge: ±4kV  |   |  |                 |      | Criterion A |



# CFM61S Series


## GENERAL CHARACTERISTICS

|  |   |             |
|--|---|-------------|
| Radio-Frequency, Continuous Radiated Disturbance | IEC 61000-4-3:2020  | Criterion A |
| Electrical Fast Transient (EFT)                  | IEC 61000-4-4:2012, $\pm 2\text{kV}$                                | Criterion A |
| Surge  | IEC 61000-4-5:2014+A1:2017, L-N: $\pm 1\text{kV}$                   | Criterion A |
| Conducted Disturbances, Induced by RF Fields     | IEC 61000-4-6:2013+COR1:2015  | Criterion A |
| Power Frequency Magnetic Field                   | IEC 61000-4-8:2009  | Criterion A |
| Voltage Dips                                     | IEC 61000-4-11:2020, Dip: 30% 10ms, Dip: 60% 100ms, Dip >95% 5000ms | Criterion A |
| Voltage Interruptions                            | IEC 61000-4-11:2020, >95% 5000ms                                    | Criterion B |
| Application Note Link                            | <a href="#">CFM61S Series App Notes</a>                             |             |


## CHARACTERISTIC CURVE

### Power Derating Curve

Output Power & Input Voltage

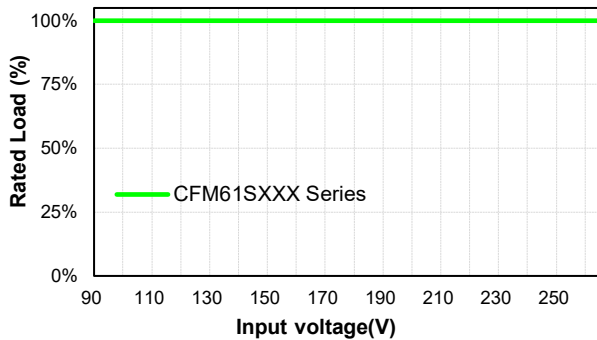


CFM61SXXX Series  
Output Power vs Ambient Temperature

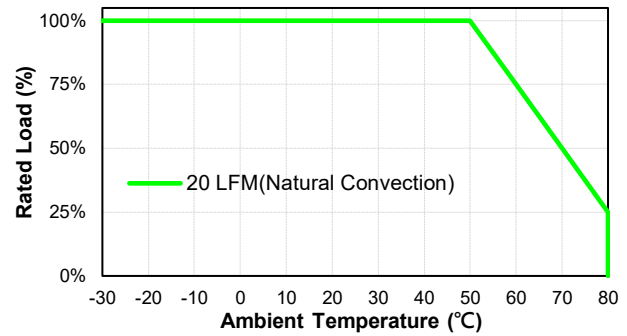


### Performance Data

CFM61S050 (Eff Vs Io)

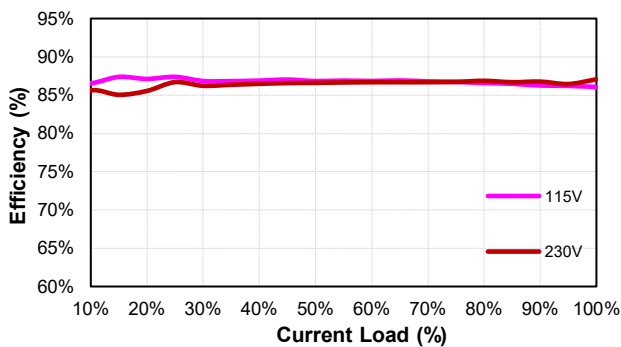


CFM61S120 (Eff Vs Io)

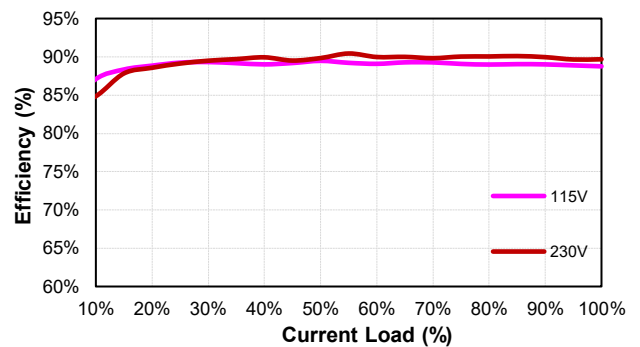




# CFM61S Series


**CFMS61S150 (Eff Vs Io)**

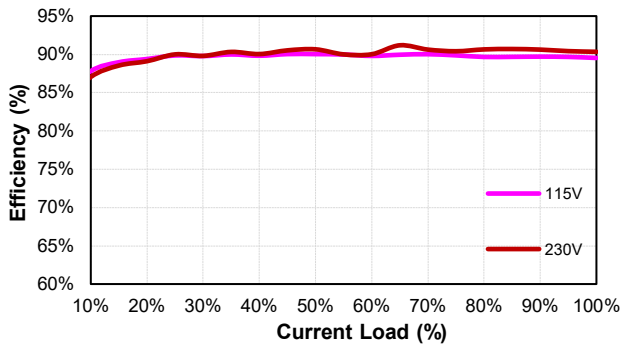


**CFM61S240 (Eff Vs Io)**

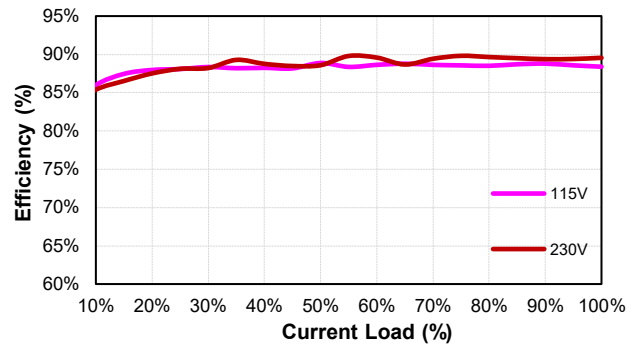

**CFM61S360 (Eff Vs Io)**

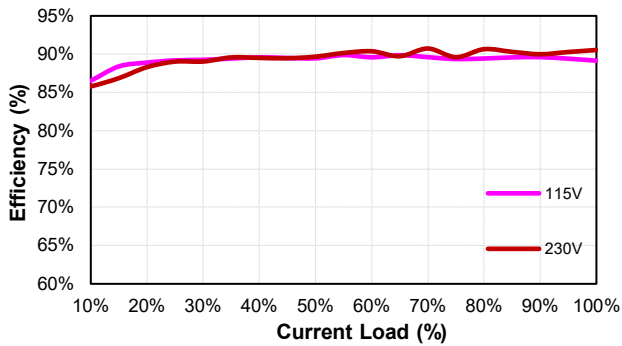

**CFM61S480 (Eff Vs Io)**

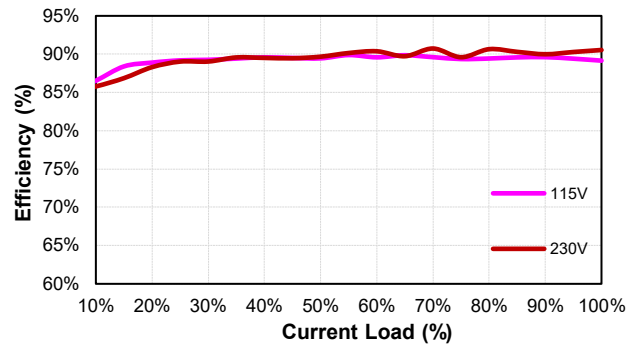





# CFM61S Series

## MECHANICAL SPECIFICATION

### CFM61SXXX

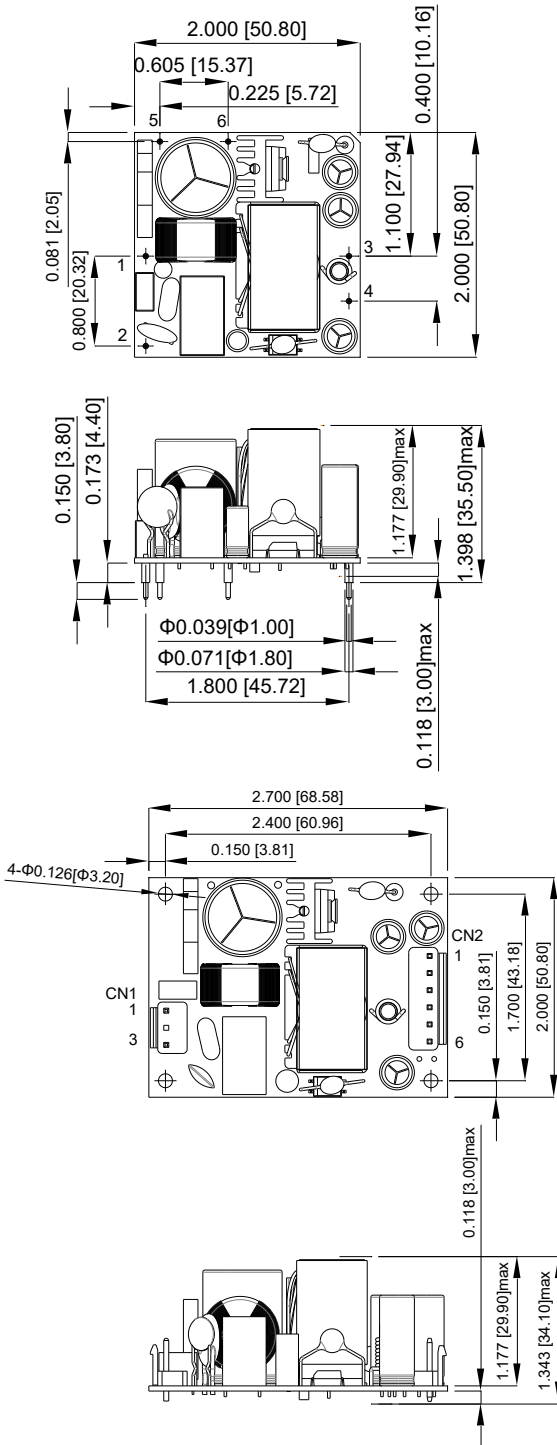

### CFM61SXXX-E

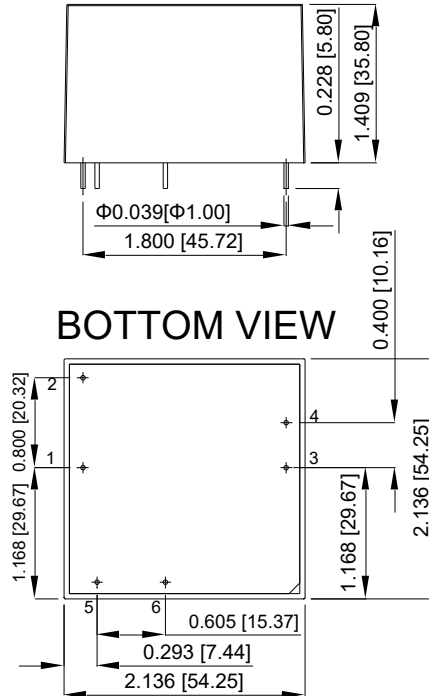

| PIN CONNECTION |          |
|----------------|----------|
| Pin            | Function |
| 1              | ACL      |
| 2              | ACN      |
| 3              | +Vout    |
| 4              | -Vout    |
| 5              | BC+      |
| 6              | BC-      |

All Dimensions In Inches[mm]  
 Tolerance Inches:x.xxx= ± 0.02  
 Millimeters: x.xx = ± 0.5

### CFM61SXXX-T

AC Input Connector(CN1):TKP PVHI-03N2 or equivalent

| Pin | Function | Mating Housing           | Terminal                       |
|-----|----------|--------------------------|--------------------------------|
| 1   | ACL      | JST VHR-3N or equivalent | JST SVH-21T-P1.1 or equivalent |
| 2   | -        |                          |                                |
| 3   | ACN      |                          |                                |

DC Output Connector(CN2):TKP PVHI-06 or equivalent

| Pin | Function | Mating Housing           | Terminal                       |
|-----|----------|--------------------------|--------------------------------|
| 1   | +Vout    | JST VHR-6N or equivalent | JST SVH-21T-P1.1 or equivalent |
| 2   | +Vout    |                          |                                |
| 3   | +Vout    |                          |                                |
| 4   | -Vout    |                          |                                |
| 5   | -Vout    |                          |                                |
| 6   | -Vout    |                          |                                |

All Dimensions In Inches[mm]  
 Tolerance Inches:x.xxx= ± 0.02  
 Millimeters: x.xx = ± 0.5

CINCON Electronics Co. Ltd.  
 Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan  
 Tel: 886-2-27086210  
 Fax: 886-2-27029852  
 E-mail: [sales@cincon.com.tw](mailto:sales@cincon.com.tw)  
 Web: [www.cincon.com](http://www.cincon.com)