



# LFM550S SERIES 550 WATT AC-DC POWER SUPPLY WITH PFC

## Features

- Universal Input Range 85~264Vac
- High Efficiency up to 94%
- Class I
- 25.4mm Low Profile Package
- Approval IEC/EN/UL 62368-1 Ed 3.0
- Approval EN 55032 and CISPR/FCC Class B
- Meets IEC/EN 60335-1
- Operating Altitude 5000m
- Continuous Short Circuit Protection
- Over Voltage Protection
- Over Temperature Protection
- High Power Density 32.84W/Inches<sup>3</sup>
- Active PFC Function
- Over Voltage Category OVC II & OVC III



MODEL NUMBER	OUTPUT VOLTAGE	OUTPUT CURRENT			RIPPLE & NOISE NOTE1	VOLTAGE ACCURACY NOTE2	VOLTAGE ADJ. RANGE	LINE REGULATION NOTE3	LOAD REGULATION NOTE4	%EFF. (Typ) NOTE5
		With Fan NOTE6	Without Conduction Cooling	With Conduction Cooling NOTE7						
LFM550S120C	12 V	45.83 A	19.16 A	37.5 A	120 mV	±1%	11.4-12.6 V	±0.3%	±0.5%	92%
LFM550S150C	15 V	36.66 A	15.33 A	30 A	150 mV	±1%	14.25-15.75 V	±0.3%	±0.5%	93%
LFM550S240C	24 V	22.91 A	9.58 A	18.75 A	200 mV	±1%	22.8-25.2 V	±0.3%	±0.5%	93%
LFM550S280C	28 V	19.64 A	8.21 A	16.07 A	200 mV	±1%	28-29.4 V	±0.3%	±0.5%	93%
LFM550S300C	30 V	18.33 A	7.67 A	15 A	200 mV	±1%	28.5-31.5 V	±0.3%	±0.5%	93%
LFM550S360C	36 V	15.27 A	6.39 A	12.5 A	200 mV	±1%	34.2-37.8 V	±0.3%	±0.5%	94%
LFM550S480C	48 V	11.45 A	4.79 A	9.37 A	200 mV	±1%	45.6-50.4 V	±0.3%	±0.5%	94%
LFM550S540C	54 V	10.18 A	4.26 A	8.34 A	200 mV	±1%	51.3-56.7 V	±0.3%	±0.5%	94%

**Note:**

1. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple & noise measuring @20MHz BW.
2. Voltage accuracy is set at full load.
3. Line regulation is measured from 100Vac to 240Vac with full load.
4. Load regulation is measured from 10% to 100% full load.
5. Typical efficiency at 230 Vac and full load at 25°C.
6. Forced air convection with 21.9CFM above 110Vac.
7. With addition cooling conduction plate, 38.1 by 38.1 cm with min. 0.2 cm thick, as below.



# LFM550S Series

## PART NUMBER

Series	Number of Outputs	Nominal Output Voltage	Type	Mounting Inserts
LFM550	O	XXX	X	-YZ
LFM550	S : Single	120 : 12V 150 : 15V 240 : 24V 280 : 28V 300 : 30V 360 : 36V 480 : 48V 540 : 54V	C : With Cover	Blank : Through Hole C0 : Threaded Hole

Part Number Example:

**LFM550S120C-C0**: With Cover 550W, Single 12Vdc Output, Threaded Hole



# LFM550S Series

## TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

### ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage	Safety approvals only to the AC input	All	85		264	$V_{ac}$
			115		370	$V_{dc}$
Operating Temperature	<b>See derating curve</b>	All	-40		80	°C
Operating Case Temperature	At the center of base plate ( $T_c =$ Case temperature)	All	-40		90	°C
Storage Temperature		All	-40		90	°C
Operating Altitude	IEC/EN/UL 62368-1 OVC II	All			5000	m
	IEC/EN/UL 62368-1 OVC III				2000	

### INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Voltage Range		All	100		240	$V_{ac}$
Input Frequency Range		All	47		63	Hz
Maximum Input Current	100% Load, $V_{in}=100V_{ac}$	All			6.3	A
Leakage Current	Contact leakage current	All			100	uA
	Earth leakage current				300	
Inrush Current	$V_{in}=240V_{ac}$ , Cold start @25°C	All			45	A
Power Factor	230 $V_{ac}$ @ Full load	All	0.96	0.98		

### OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Set Point	$V_{in}=\text{Nominal } V_{in}$ , $I_o=I_o \text{ max.}$ , $T_c=25^\circ\text{C}$	LFM550S120	11.88	12	12.12	$V_{dc}$
		LFM550S150	14.85	15	15.15	
		LFM550S240	23.76	24	24.24	
		LFM550S280	27.72	28	28.28	
		LFM550S300	29.7	30	30.3	
		LFM550S360	35.64	36	36.36	
		LFM550S480	47.52	48	48.48	
		LFM550S540	53.46	54	54.54	
Operating Output Current Range	$V_{in}=85V_{ac}\sim 264V_{ac}$ , <b>see derating curve</b>	LFM550S120	0		45.83	A
		LFM550S150	0		36.66	
		LFM550S240	0		22.91	
		LFM550S280	0		19.64	
		LFM550S300	0		18.33	
		LFM550S360	0		15.27	
		LFM550S480	0		11.45	
		LFM550S540	0		10.18	
Holdup Time	$V_{in}=115V_{ac}$ Load:550W, ambient temperature= $25^\circ\text{C}$	All	8	12		ms
Output Voltage Regulation						
Load Regulation	10% Load to full load	All			$\pm 0.5$	%
Line Regulation	$V_{in}=\text{High line to low line}$	All			$\pm 0.3$	%
Output Voltage Adjustment	$P_o \leq \text{max. rated power}$ , $I_o \leq I_o \text{ max.}$	LFM550S280	0		+5	%
		Others	-5		+5	



# LFM550S Series

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Over Voltage Protection	Latch off (AC recycle to reset)	LFM550S120			16	V <sub>dc</sub>
		LFM550S150			22	
		LFM550S240			32	
		LFM550S280			35	
		LFM550S300			35	
		LFM550S360			45	
		LFM550S480			57	
		LFM550S540			63	
Over Current Protection	Auto recovery (output is rated load)	All	120	140	160	%
Short Circuit Protection	Auto recovery	All				
Over Temperature Protection	Auto recovery	All				
Output Ripple and Noise	1. Add a 0.1uF ceramic capacitor and a 10uF aluminum electrolytic capacitor to output 2. Oscilloscope is 20MHz band width 3. Ambient temperature=25°C	LFM550S120			120	mV
		LFM550S150			150	
		LFM550S240			200	
		LFM550S280			200	
		LFM550S300			200	
		LFM550S360			200	
		LFM550S480			200	
		LFM550S540			200	
Load Capacitance	1. V <sub>in</sub> =115V <sub>ac</sub> and 230V <sub>ac</sub> 2. Output is max. load 3. Ambient temperature=25°C	LFM550S120			27200	uF
		LFM550S150			22400	
		LFM550S240			14100	
		LFM550S280			11600	
		LFM550S300			10600	
		LFM550S360			9020	
		LFM550S480			7200	
		LFM550S540			6000	
Efficiency	1. Input Voltage is 230V <sub>ac</sub> 2. Output is rated load 3. Ambient temperature=25°C	LFM550S120		92		%
		LFM550S150		93		
		LFM550S240		93		
		LFM550S280		93		
		LFM550S300		93		
		LFM550S360		94		
		LFM550S480		94		
		LFM550S540		94		

## ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input to Output	1 Minute (without dielectric breakdown)	All			4250	V <sub>ac</sub>
Input to Earth (Ground)	1 Minute (without dielectric breakdown)	All			2000	V <sub>ac</sub>
Output to Earth (Ground)	1 Minute (without dielectric breakdown)	All			2000	V <sub>ac</sub>
Isolation Resistance	Input to output	All	100			MΩ

## FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency	P <sub>out</sub> =max. rated power	All		65		kHz



# LFM550S Series

## GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	I <sub>o</sub> =100%; T <sub>a</sub> =25°C per MIL-HDBK-217F I <sub>o</sub> =100%; T <sub>a</sub> =25°C per Telcordia SR332	All	400 1300			k hours
Life Time	@75% Load, 40°C	All	45			k hours
Humidity	Non-condensing	All			93	% RH
Shock	Meet MIL-STD-810F Table 516.5, Table 516.5-1 10ms, each axis 3 times(±X、±Y、±Z axis)	All		75		g
Vibration	Meet MIL-STD-810F Table 514.5C-VIII, 15~2000Hz, X、Y、Z axis, 1 hour (each axis),. Total 3 hrs.	All		4		g
Weight		All		535		grams
Dimensions			5.09x3.29x1.00 Inches (129.4x83.5x25.4mm)			
<b>Safety</b>	Class I, IEC/EN/UL 62368-1					Ed. 3.0
<b>EMC Emission</b>	EN 55032:2015+A11:2020, IEC/EN 61000-6-4:2019, EN 61204-3:2018, IEC/EN 61000-3-2:2019+A2:2024, EN 61000-3-3:2013+A1:2019+A2:2021+AC2022, 47 CFR FCC Part 15					
Conducted Disturbance	EN 55032:2015+A11:2020, 47 CFR FCC Part 15					Class B
Radiated Disturbance	EN 55032:2015+A11:2020, 47 CFR FCC Part 15					Class B
Harmonic Current Emissions	IEC/EN 61000-3-2:2019+A2:2024					Class A, C, D
Voltage Fluctuations & Flicker	EN 61000-3-3:2013+A1:2019+A2:2021+AC2022					Criterion A
<b>EMC Immunity</b>	EN 55035:2017+A11:2020, IEC/EN 61000-6-2:2019, EN 61204-3:2018					
Electrostatic Discharge (ESD)	IEC 61000-4-2:2008 Air Discharge: ±8kV, Contact Discharge: ±4kV					Criterion A
Radio-Frequency, Continuous Radiated Disturbance	IEC 61000-4-3:2020					Criterion A
Electrical Fast Transient (EFT)	IEC 61000-4-4:2012, ±2kV					Criterion A
Surge	IEC 61000-4-5:2014+A1:2017, L-N: ±2kV, L-E (Ground): ±4kV					Criterion A
Conducted Disturbances, Induced by RF Fields	IEC 61000-4-6:2023					Criterion A
Power Frequency Magnetic Field	IEC 61000-4-8:2009					Criterion A
Voltage Dips	IEC 61000-4-11:2020, Dip: 30% Reduction, Dip >95% Reduction					Criterion A
Voltage Interruptions	IEC 61000-4-11:2020, >95% Reduction					Criterion B
Application Note Link	<a href="#">LFM550S Series App Notes</a>					




# LFM550S Series


## CHARACTERISTIC CURVE

### Power Derating Curve

Output Power vs Ambient Temperature

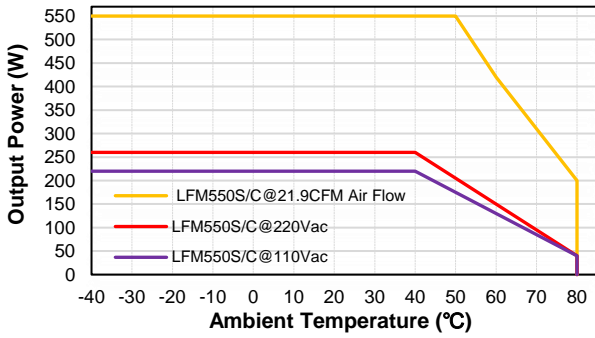


Output Power & Input Voltage

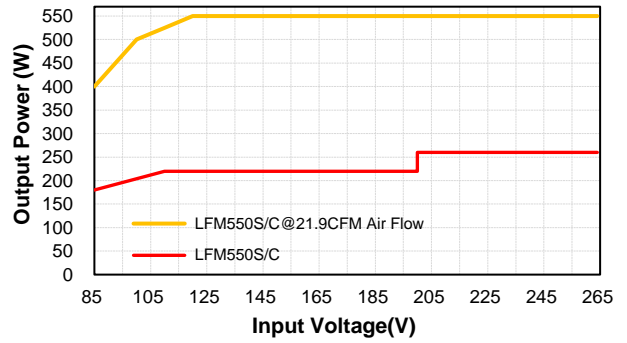


### Conduction Convection with External Baseplate (38.1cmx38.1cmx0.2cm)


Output Power vs Ambient Temperature

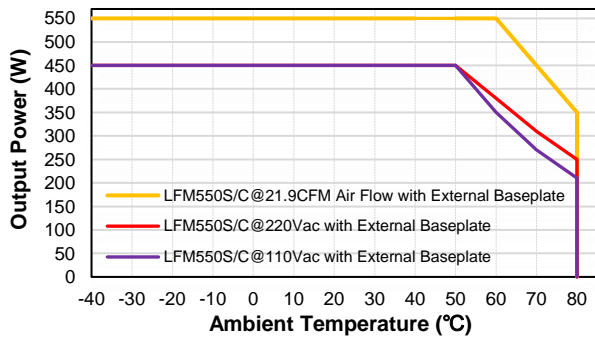

Output Power & Input Voltage

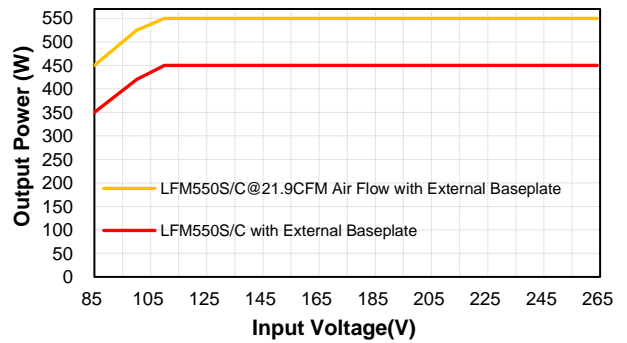

Output Power vs Case Temperature (Tc)

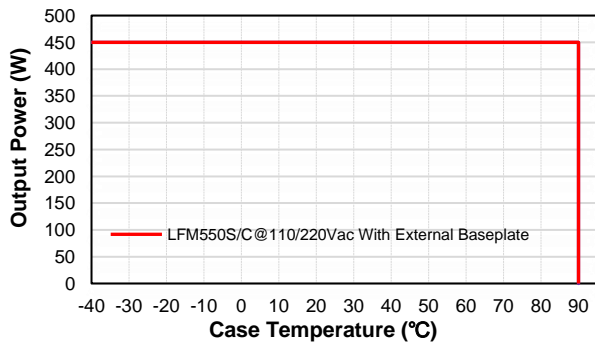





# LFM550S Series

## Performance Data


LFM550S120 (Eff Vs Io)

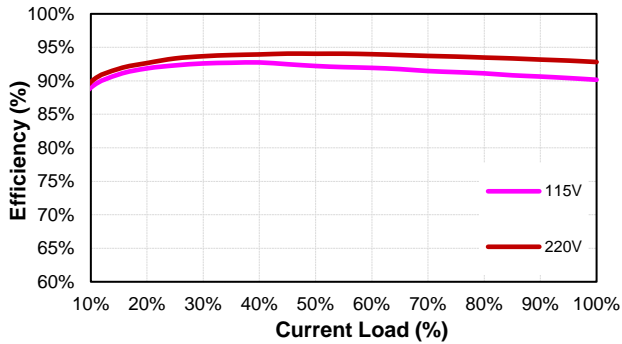


LFM550S150 (Eff Vs Io)

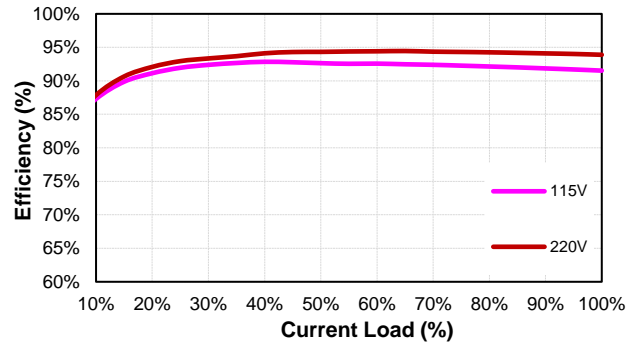


LFM550S240 (Eff Vs Io)

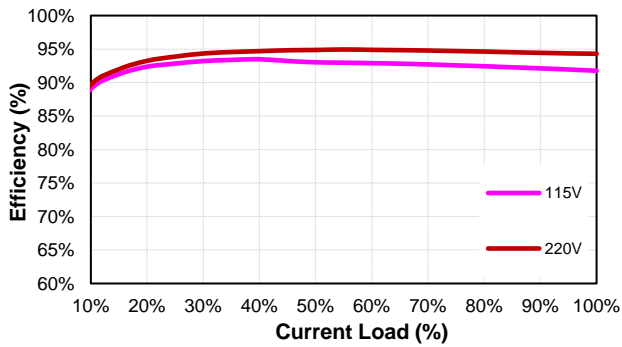


LFM550S280 (Eff Vs Io)

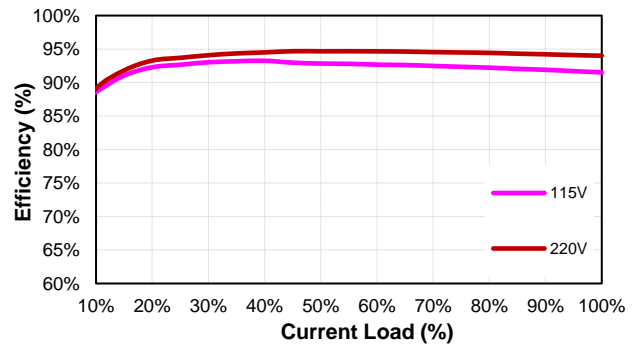


LFM550S300 (Eff Vs Io)

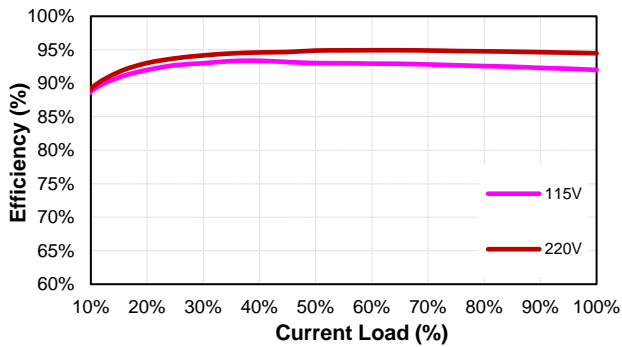


LFM550S360 (Eff Vs Io)

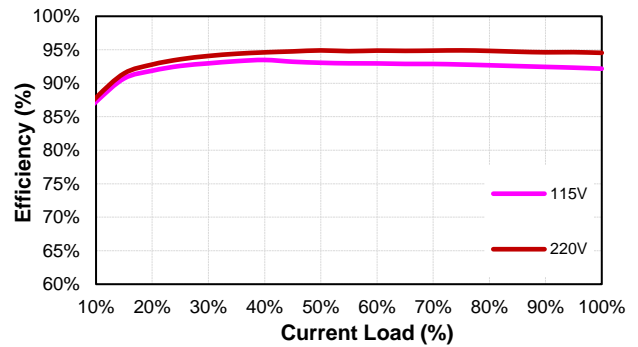

LFM550S480 (Eff Vs Io)

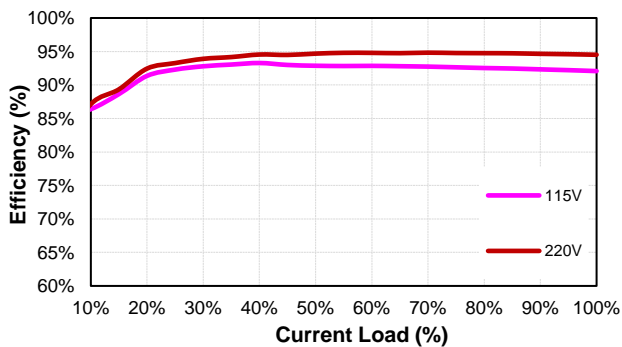


LFM550S540 (Eff Vs Io)

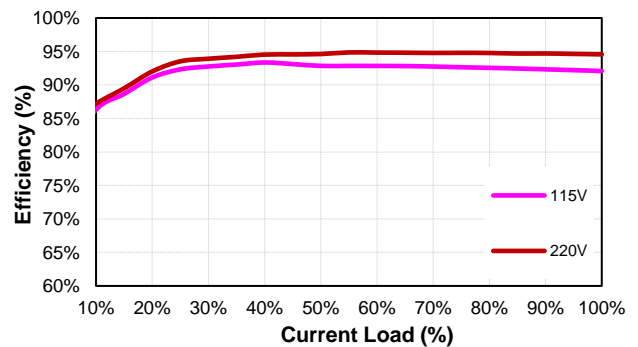



# LFM550S Series

## MECHANICAL SPECIFICATION

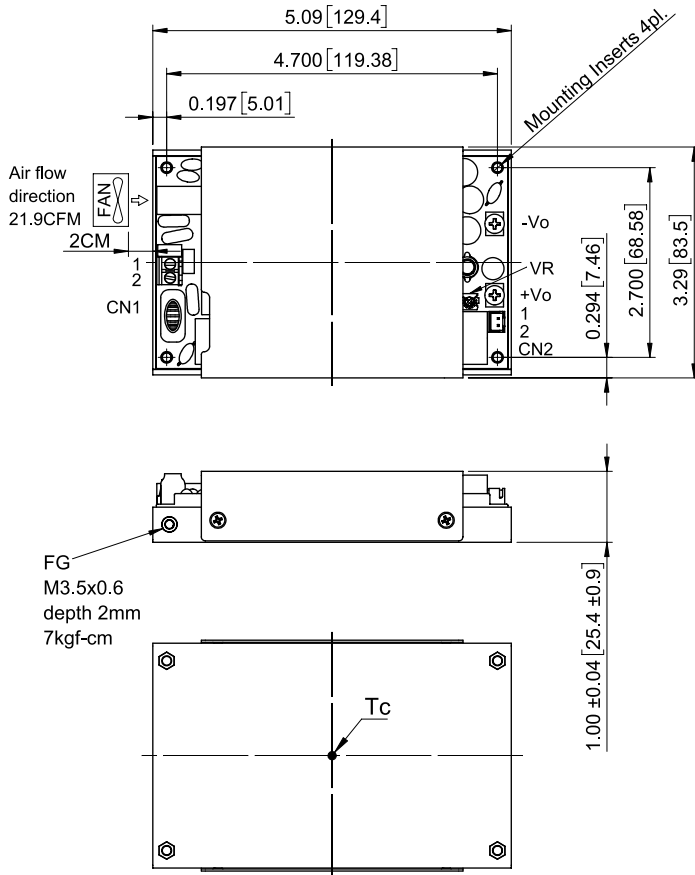

All Dimensions in Inches[mm]  
 Tolerance Inches: x.xx=±0.03, x.xxx=±0.020  
 Millimeters: x.x=±0.7, x.xx=±0.50

AC Input Connector(CN1):ECE ETB22

Pin	Function	Mating Wire Range
1	ACL	14~16 AWG
2	ACN	

DC Output Connector(CN2):TKP 8822-02-NHB or equivalent

Pin	Function	Mating Housing	Terminal
1	Rs+	JST XHP-2 or equivalent	JST SXH-001T-P0.6N or equivalent
2	Rs-		

DC Output Connector:KANG YANG PCB-58M4

Function	The screw locked torque
+Vo	M4 7kgf-cm
-Vo	

Mounting Inserts

Series	Option
Blank	∅3.2 Through depth 10.5mm
-C0	M3x0.5 Threaded depth 10.5mm

CINCON Electronics Co. Ltd.  
 Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan  
 Tel: 886-2-27086210  
 Fax: 886-2-27029852  
 E-mail: [sales@cincon.com.tw](mailto:sales@cincon.com.tw)  
 Web: [www.cincon.com](http://www.cincon.com)