



CFM600S SERIES 600 WATT AC-DC POWER SUPPLY WITH PFC

Features

- Universal Input Range 80~264V_{ac}
- High Efficiency up to 94.5%
- 3"x 5" Compact Size
- Class I & Class II
- No Load Power Consumption<1W
- Approval IEC/EN/UL 62368-1
- Approval EN 55032, 47 CFR FCC Part 15
- Active PFC Meets EN 61000-3-2
- Design Meets IEC/EN 60335-1
- Operating Altitude 5000m
- High Power Density up to 25.97W/Inch³
- Up to 510W Natural, 600W Conduction Convection
- Over Temperature Protection
- PS On/Off Remote Control
- Power Good & Power Fail Signal
- +5V Stand-by, 12V Fan Output
- Low Inrush Current
- Parallel Operation Option (Active Current Sharing)



MODEL NUMBER	OUTPUT VOLTAGE	OUTPUT CURRENT			VOLTAGE ACCURACY NOTE1	RIPPLE& NOISE NOTE2	VOLTAGE ADJ. RANGE	LINE REGULATION NOTE3	LOAD REGULATION NOTE4	%EFF. (Typ.)
		FAN	COVER	OPEN						
CFM600S120	12 V	50.00 A	32.08 A	26.25 A	±1%	120 mV	11.4~12.6 V	±0.5%	±1%	92.5%
CFM600S150	15 V	40.00 A	25.67 A	21 A	±1%	150 mV	14.25~15.75 V	±0.5%	±1%	93.0%
CFM600S180	18 V	33.33 A	21.39 A	17.5 A	±1%	180 mV	17.1~18.9 V	±0.5%	±1%	93.5%
CFM600S240	24 V	25.00 A	18.33 A	16.875 A	±1%	180 mV	22.8~25.2 V	±0.5%	±1%	94.5%
CFM600S280	28 V	21.42 A	15.71 A	14.46 A	±1%	200 mV	26.6~29.4 V	±0.5%	±1%	94.5%
CFM600S300	30 V	20.00 A	14.67 A	13.5 A	±1%	200 mV	28.5~31.5 V	±0.5%	±1%	94.5%
CFM600S360	36 V	16.66 A	12.22 A	11.25 A	±1%	200 mV	34.2~37.8 V	±0.5%	±1%	94.5%
CFM600S480	48 V	12.50 A	9.17 A	8.44 A	±1%	250 mV	45.6~50.4 V	±0.5%	±1%	94.5%
Stand-by Output Voltage										
CFM600SXXX	+5V	1A			±3%	100 mV	---	±1%	±5%	---
CFM600SXXXC		0.5A			±3%	100 mV	---	±1%	±5%	---
CFM600SXXXF	+5V	0.5A			±3%	100 mV	---	±1%	±5%	---
Fan Output Voltage										
All	+12V	0.5A (NOTE 5)			11.6 ~ 13.5V (NOTE 6)	---	---	---	---	---

Note:

1. Voltage accuracy is set at 100% full load and 25°C Ta.
2. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple & noise measuring @20MHz BW.
3. Line regulation is measured from high line to low line with 100% full load.
4. Load regulation is measured from 10% to 100% full load.
5. Fan output can only operate normal when the stand-by output is above 0.5A.
6. CFM600SXXX & CFM600SXXXC: Stand-by output load 1A, fan output load 0.5A.
CFM600SXXXF: Stand-by output load 0.5A, fan output load 0.5A.



CFM600S Series

PART NUMBER

Series	Number of Outputs	Nominal Output Voltage	Type	Function	Output Terminal
CFM600	X	XXX	X (Option)	-XX(Option)	-X(Option)
CFM600	S : Single	120 : 12V 150 : 15V 180 : 18V 240 : 24V 280 : 28V 300 : 30V 360 : 36V 480 : 48V	None : With Baseplate C : With Cover F : With Fan	PC : Parallel Control	None : Vertical R : Horizontal

Part Number Example:

CFM600S120: With Baseplate, 600W, 12V_{dc} Output, Vertical Type Terminal

CFM600S120C: With Cover, 600W, 12V_{dc} Output, Vertical Type Terminal

CFM600S120F: With Fan, 600W, 12V_{dc} Output, Vertical Type Terminal

CFM600S120-R: With Baseplate, 600W, 12V_{dc} Output, Horizontal Type Terminal

CFM600S120-PC: With Baseplate, 600W, 12V_{dc} Output, Parallel Control, Vertical Type Terminal



CFM600S Series

TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage	Safety approvals only to the AC input	All	80		264	V _{ac}
Operating Temperature	See derating curve	All	-40		85	°C
Maximum Case Temperature	At the Center of Base Plate (T _c = Case temperature)	All	-40		90	°C
Storage Temperature		All	-40		85	°C
Operating Altitude		All			5000	m

INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Voltage Range		All	100		240	V _{ac}
Input Frequency Range		All	47		63	Hz
Maximum Input Current	100% Full Load, V _{in} =100V _{ac}	All			7.2	A
Power Factor	V _{in} =230V _{ac}	All		0.97		
Leakage Current (Earth)		All			300	uA
Leakage Current (Touch)		All			100	uA
Inrush Current	V _{in} =240V _{ac} , Cold start at 25°C	All		8.5		A

OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Set Point	V _{in} =Nominal V _{in} , I _o =I _o max., T _c =25°C	CFM600S120	11.88	12	12.12	V _{dc}
		CFM600S150	14.85	15	15.15	
		CFM600S180	17.82	18	18.18	
		CFM600S240	23.76	24	24.24	
		CFM600S280	27.72	28	28.28	
		CFM600S300	29.70	30	30.30	
		CFM600S480	47.52	48	48.48	
Operating Output Current Range	V _{in} =80V _{ac} ~264V _{ac} , see derating curve	CFM600S120			50.00	A
		CFM600S150			40.00	
		CFM600S180			33.33	
		CFM600S240			25.00	
		CFM600S280			21.42	
		CFM600S300			20.00	
		CFM600S480			12.50	
Holdup Time	V _{in} =115V _{ac}	All		12		ms
Output Voltage Regulation						
Load Regulation	10% to 100% full load	All			±1.0	%
Line Regulation	V _{in} =High line to low line	All			±0.5	%
Over Voltage Protection	Latch off (AC recycle to reset)	CFM600S120			16	V _{dc}
		CFM600S150			25	
		CFM600S180			25	
		CFM600S240			35	
		CFM600S280			35	
		CFM600S300			35	
		CFM600S480			60	



CFM600S Series

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Over Current Protection	Auto recovery	All	120		190	%
Short Circuit Protection	Auto recovery	All				
Over Temperature Protection	Auto recovery	All				
Current Sharing Accuracy	50% to 100% full load	Option	-5		+5	%
Output Ripple and Noise	1. Add a 0.1uF ceramic capacitor and a 10uF aluminum electrolytic capacitor to output 2. Oscilloscope is 20MHz bandwidth 3. Ambient temperature=25°C	CFM600S120 CFM600S150 CFM600S180 CFM600S240 CFM600S280 CFM600S300 CFM600S360 CFM600S480			120 150 180 180 200 200 200 250	mV
Load Capacitance	1. $V_{in}=115V_{ac}$ and $230V_{ac}$ 2. Output is 100% full load 3. Ambient temperature=25°C	CFM600S120 CFM600S150 CFM600S180 CFM600S240 CFM600S280 CFM600S300 CFM600S360 CFM600S480			50000 40000 33000 25000 21420 20000 16670 12500	uF
Efficiency	1. $V_{in}=230V_{ac}$ 2. Output is 100% full load 3. Ambient temperature=25°C	CFM600S120 CFM600S150 CFM600S180 CFM600S240 CFM600S280 CFM600S300 CFM600S360 CFM600S480		92.5 93.0 93.5 94.5 94.5 94.5 94.5 94.5		%
PS-On Signal (Absolute Maximum Rating:60V)	Power on	All	0		2	V_{dc}
	Power off (PS-ON and GND open)		4			
	Power on (PS-ON and GND short)		10			mA
	Power-off (PS-ON and GND open)		0			
Power Good (PG)	1. $V_{in}=80V_{ac}\sim 264V_{ac}$ 2. Output is 100% full load 3. The TTL goes high after power set up	All	100		500	ms
Power Fail (PF)	1. $V_{in}=80V_{ac}\sim 264V_{ac}$ 2. Output is 100% full load 3. The TTL goes low before V_o below 90% rated value	All	1	5		ms

ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input to Output	1 Minute	All			4000	V_{ac}
Input to Earth (Ground)	1 Minute (without dielectric breakdown)	All			1800	V_{ac}
Output to Earth (Ground)	1 Minute (without dielectric breakdown)	All			1800	V_{ac}
Isolation Resistance	Input to output	All	100			MΩ

FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency	$P_{out}=\text{max. rated power}$	All		65		kHz
Output Voltage Adjustment		All	-5		+5	%



CFM600S Series

GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	$I_o=100\%$; $T_a=25^\circ\text{C}$ per MIL-HDBK-217F	All		145		k hours
	$I_o=100\%$; $T_a=25^\circ\text{C}$ per Telcordia SR332	CFM600SXXX CFM600SXXXC		1230		
		CFM600SXXXF		1100		
Humidity	Non-condensing	All			93	% RH
Shock	Meet MIL-STD-810F Table 516.5, Table 516.5-I 10ms, each axis 3 times($\pm X \cdot \pm Y \cdot \pm Z$ axis)	All		75		g
Vibration	Meet MIL-STD-810F Table 514.5C-VIII, 15~2000Hz, X · Y · Z axis, 1 hour (each axis),. Total 3 hrs.	All		4		g
Weight	Baseplate versions	CFM600SXXX		520		g
	Covered versions	CFM600SXXXC		640		
	Fan versions	CFM600SXXXF		710		
Dimensions	Baseplate versions	CFM600SXXX	5.00x3.00x1.539 Inches (127.0x76.2x39.10 mm)			
	Covered versions	CFM600SXXXC	5.35x3.43x1.673 Inches (136.00x87.0x42.50 mm)			
	Fan versions	CFM600SXXXF	5.35x3.43x2.68 Inches (136.0x87.0x68.1 mm)			

GENERAL SPECIFICATIONS





Safety	Class I, IEC/EN/UL 62368-1	Ed 3.0
EMC Emission	EN 55032, EN 61000-6-3 Class B EN 61000-6-4, 47 CFR FCC Part 15 Subpart B (Class B) EN 61204-3, EN 61000-3-2, EN 61000-3-3	
Conducted Disturbance	EN 55032, EN 61000-6-3, Class B EN 61000-6-4, 47 CFR FCC Part 15 Subpart B (Class B)	Class B
Radiated Disturbance	EN 55032, EN 61000-6-3, Class B EN 61000-6-4, 47 CFR FCC Part 15 Subpart B (Class B) (Class II Only Meets to Class A, Class B Must Add Parts, Refer to Application Note)	Class B
Harmonic Current Emissions	IEC 61000-3-2	Class A, C
Voltage Fluctuations & Flicker	IEC 61000-3-3	
EMC Immunity	EN 55035, EN 61000-6-1, EN 61000-6-2 EN 61204-3, IEC 61000-4-2, 3, 4, 5, 6, 8, 11	
Electrostatic Discharge (ESD)	IEC 61000-4-2, Level 3: Air Discharge: $\pm 8\text{kV}$, Contact Discharge: $\pm 4\text{kV}$	Criterion A
Radio-Frequency, Continuous Radiated Disturbance	IEC 61000-4-3, Level 3: 80~1000MHz, 10V/m	Criterion A
Electrical Fast Transient (EFT)	IEC 61000-4-4, Level 3: $\pm 1\text{kV}$, $\pm 2\text{kV}$	Criterion A
Surge	IEC 61000-4-5, Level 4: L-N: $\pm 0.5\text{kV}$, $\pm 1\text{kV}$, $\pm 2\text{kV}$, L-E(Ground): $\pm 0.5\text{kV}$, $\pm 1\text{kV}$, $\pm 2\text{kV}$, $\pm 4\text{kV}$	Criterion A
Conducted Disturbances, Induced by RF Fields	IEC 61000-4-6, Level 3: 0.15~80MHz, 10V	Criterion A
Power Frequency Magnetic Field	IEC 61000-4-8, Level 3: 50Hz or 60Hz, 1A/m, 3A/m, 10A/m	Criterion A
Voltage Dips	IEC 61000-4-11, Dip: 30% Reduction, Dip >95% Reduction	Criterion A
Voltage Interruptions	IEC 61000-4-11, >95% Reduction	Criterion B
Application Note Link	CFM600S Series App Notes	



CHARACTERISTIC CURVE

Power Derating Curve





Forced Air Flow

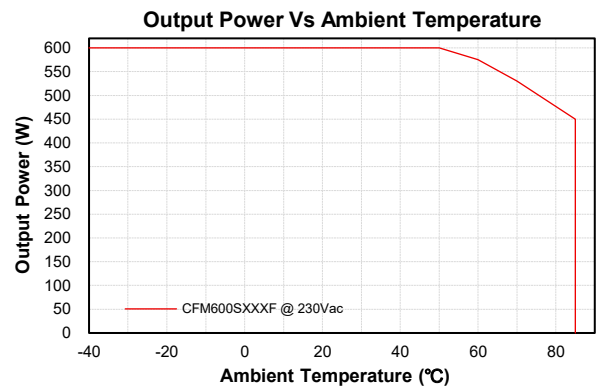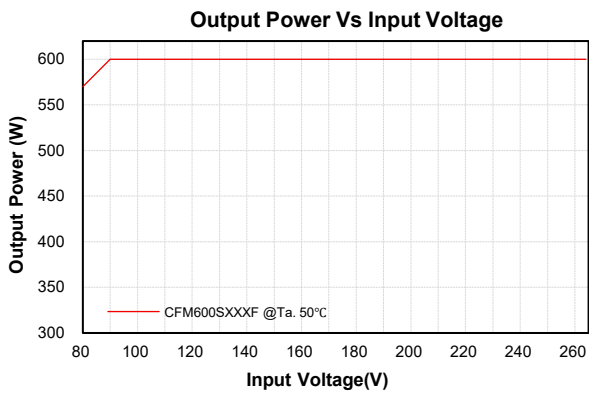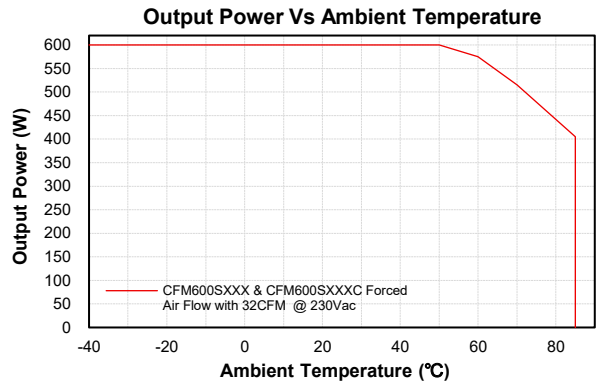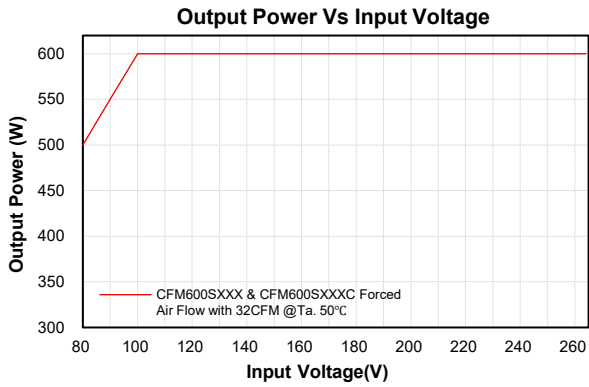



CFM600S Series

Natural Convection

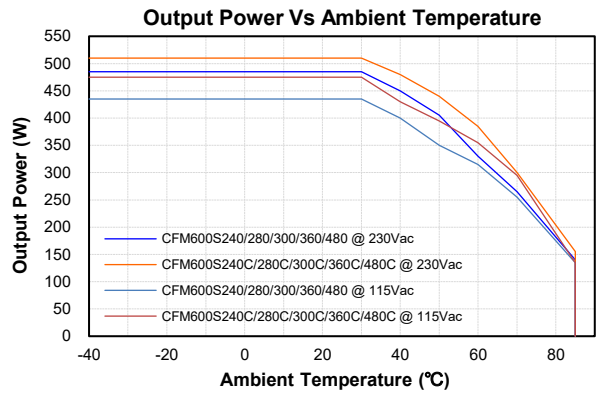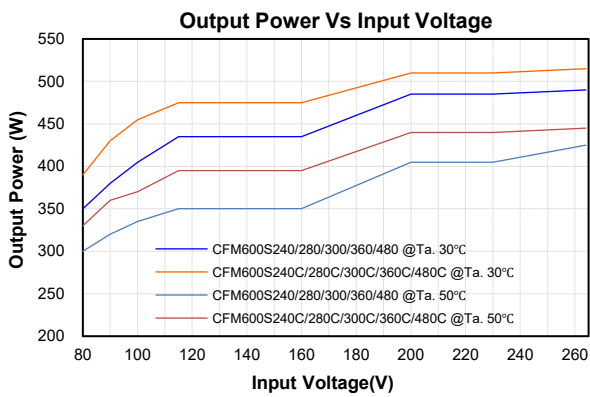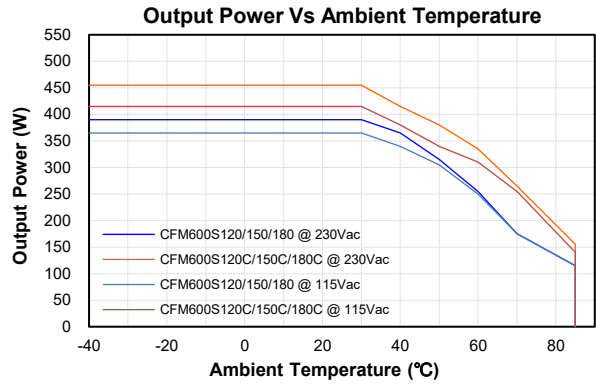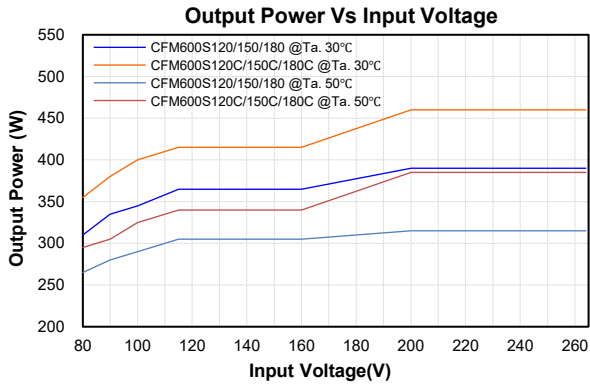





CFM600S Series

Conduction Convection with External Baseplate (43x43x0.2cm)


Output Power Vs Input Voltage

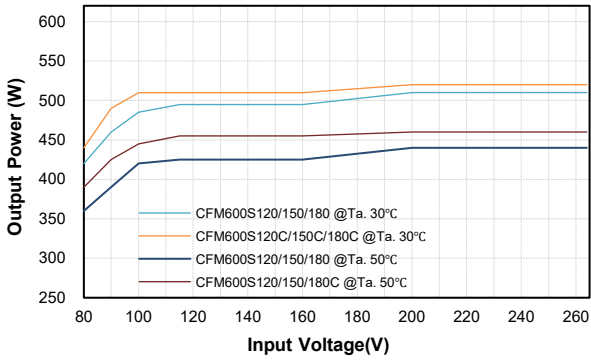


Output Power Vs Ambient Temperature

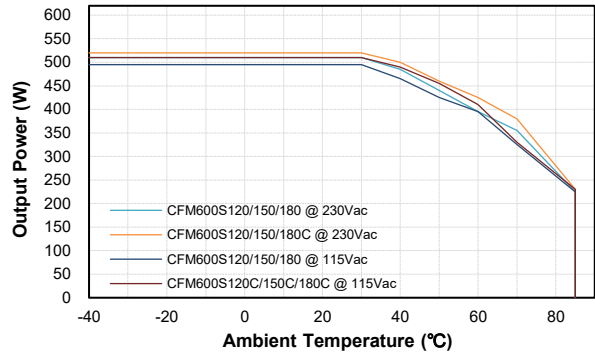

Output Power Vs Input Voltage

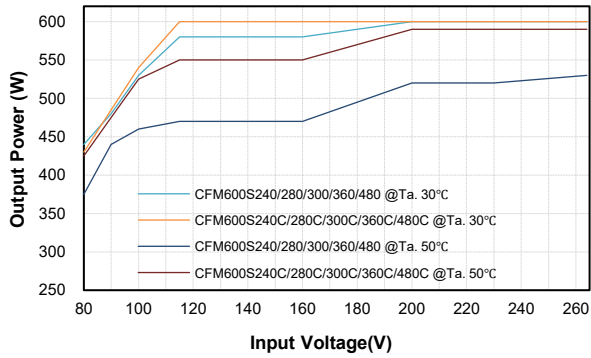

Output Power Vs Ambient Temperature

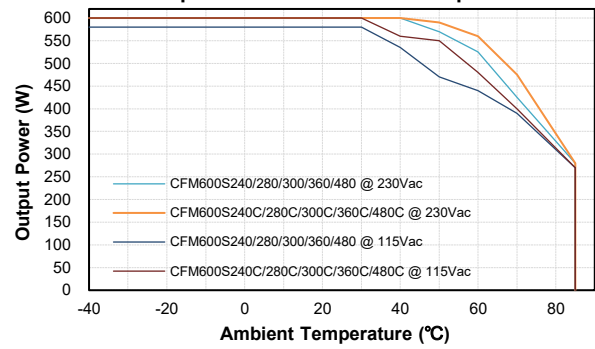









Output Power Vs Case Temperature (T_c)








Performance Data

CFM600S Series

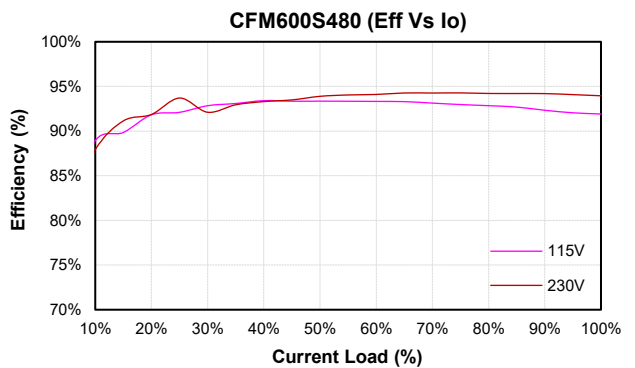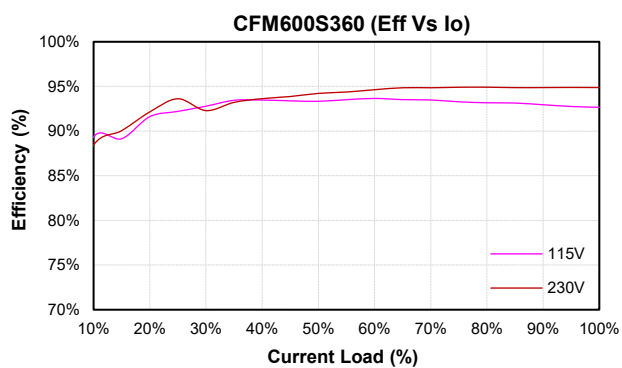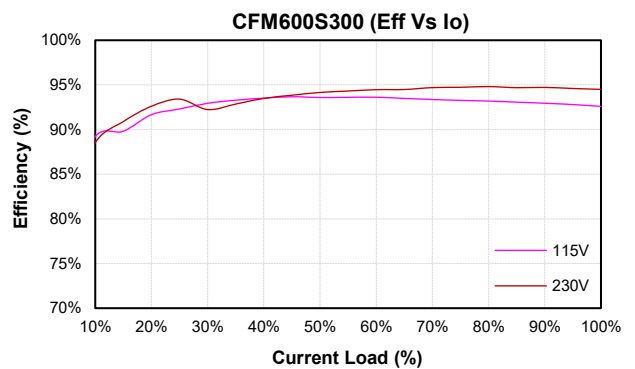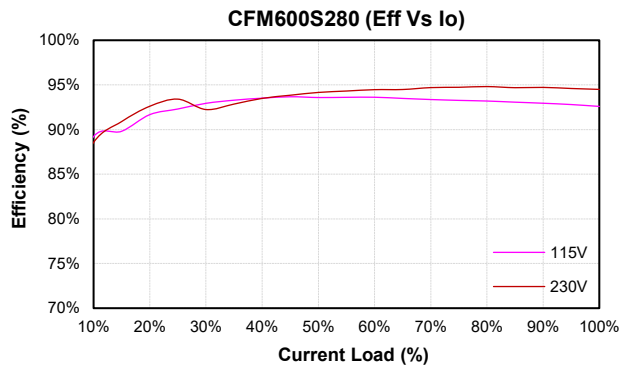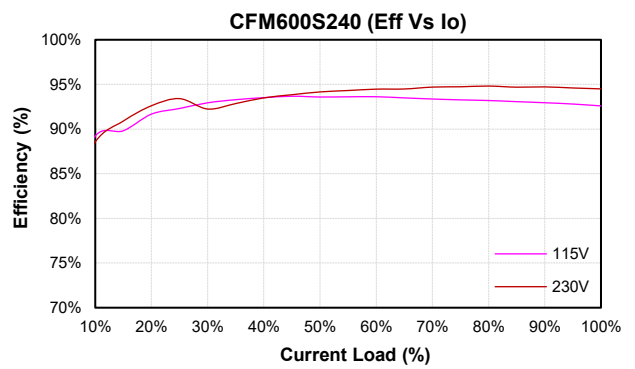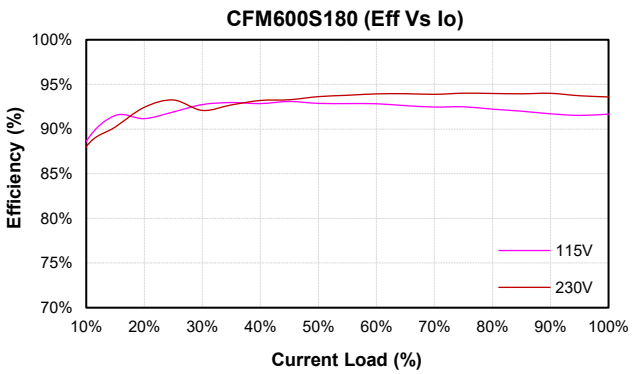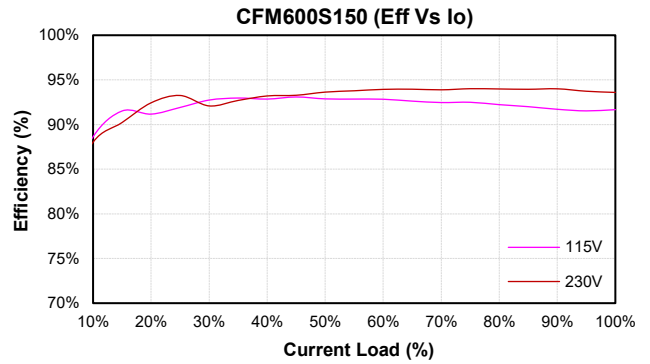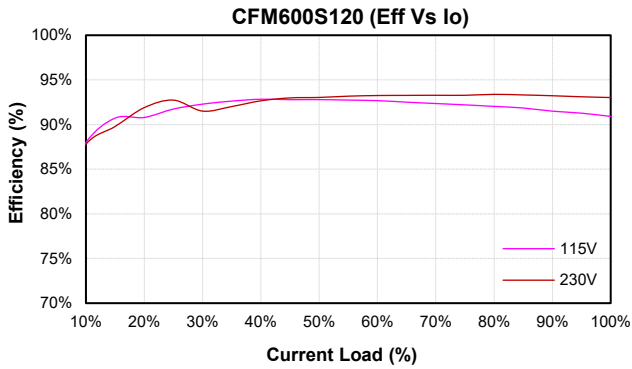

MECHANICAL SPECIFICATION

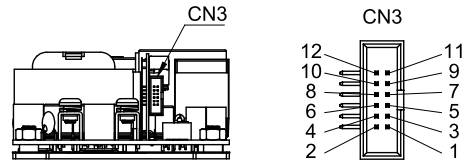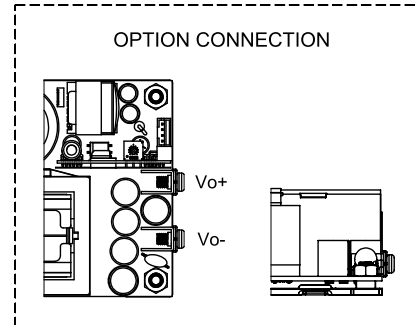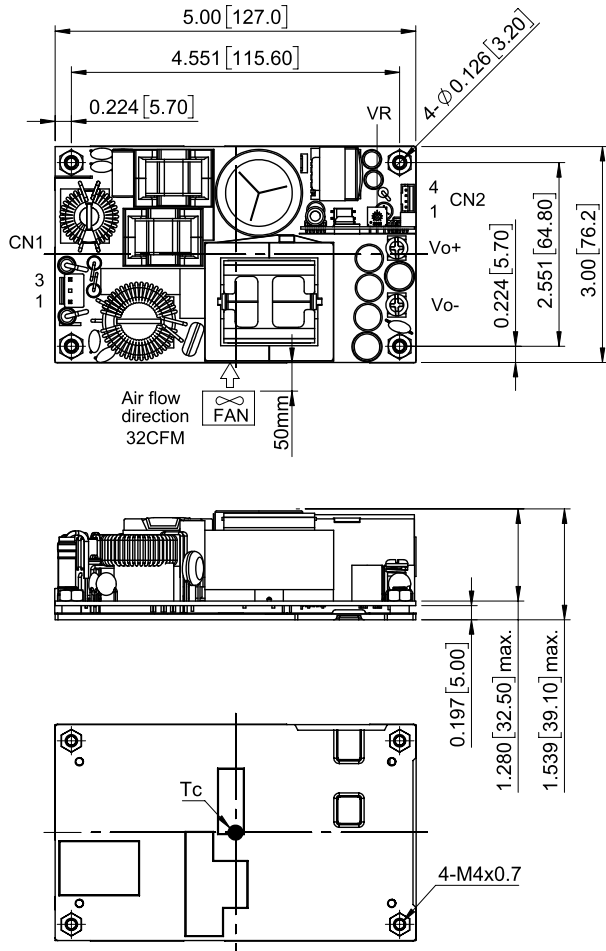

CFM600SXXX

All Dimensions in Inches[mm]
 Tolerance Inches: x.xx=±0.03, x.xxx=±0.020
 Millimeters: x.x=±0.7, x.xx=±0.50

AC Input Connector(CN1):JST B2P3-VH or equivalent

Pin	Function	Mating Housing	Terminal
1	ACL	JST VHR-3N or equivalent	JST SVH-41T-P1.1 or equivalent
2	-		
3	ACN		

DC Output Connector(CN2):TKP P110I-04 or equivalent

Pin	Function	Mating Housing	Terminal
1	GND	JST PHR-4 or equivalent	JST SPH-002T-P0.5L or equivalent
2	+5VSB		
3	GND		
4	+12V-FAN		




DC Output Connector(CN3):Townes B304F-12RGF-104-LH or equivalent

Pin	Function	Mating Housing
1	SGND	Samtec FFSD-06-01-N or equivalent
2	NA	
3	NA	
4	NA	
5	NA	
6	NA	
7	PS ON/OFF	
8	GND	
9	PG/PF	
10	PC(Optional)	
11	Vsns-	
12	Vsns+	

DC Output Connector:KANG YANG PCB-58M4 or equivalent

Function	The screw locked torque
Vo-	M4 7kgf-cm
Vo+	

MECHANICAL SPECIFICATION

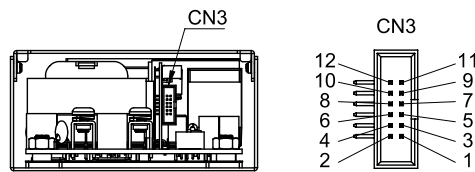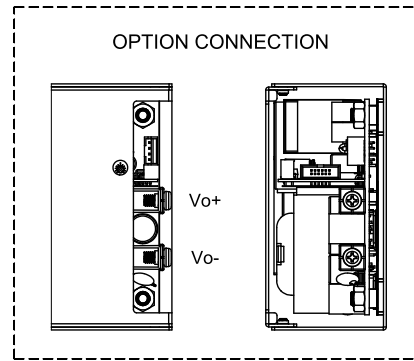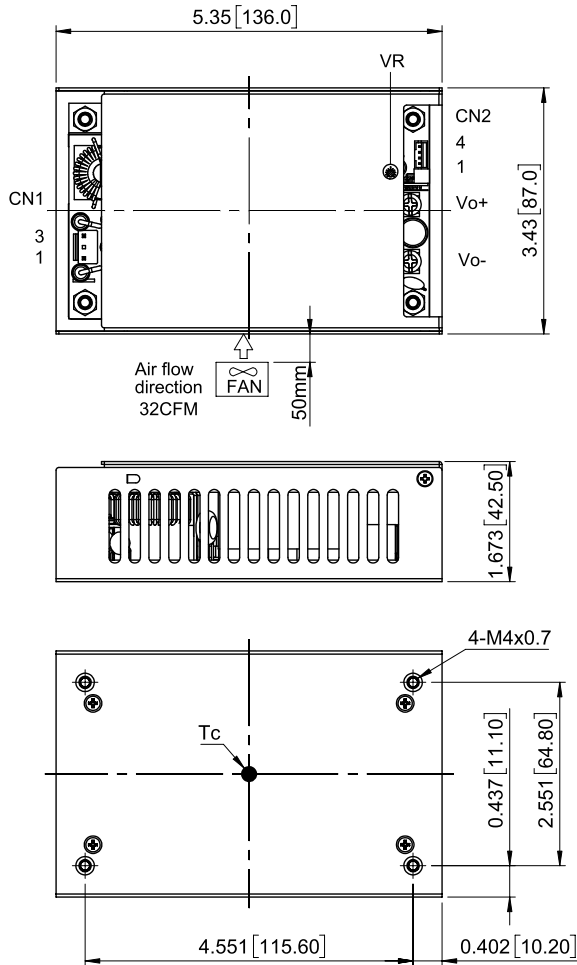

CFM600SXXXC

All Dimensions in Inches[mm]
 Tolerance Inches: x.xx=±0.03, x.xxx=±0.020
 Millimeters: x.x=±0.7, x.xx=±0.50

AC Input Connector(CN1):JST B2P3-VH or equivalent

Pin	Function	Mating Housing	Terminal
1	ACL	JST VHR-3N or equivalent	JST SVH-41T-P1.1 or equivalent
2	-		
3	ACN		

DC Output Connector(CN2):TKP P110I-04 or equivalent

Pin	Function	Mating Housing	Terminal
1	GND	JST PHR-4 or equivalent	JST SPH-002T-P0.5L or equivalent
2	+5VSB		
3	GND		
4	+12V-FAN		

DC Output Connector(CN3):Townes B304F-12RGF-104-LH or equivalent

Pin	Function	Mating Housing
1	SGND	Samtec FFSD-06-01-N or equivalent
2	NA	
3	NA	
4	NA	
5	NA	
6	NA	
7	PS ON/OFF	
8	GND	
9	PG/PF	
10	PC(Optional)	
11	Vsns-	
12	Vsns+	






DC Output Connector:KANG YANG PCB-58M4 or equivalent

Function	The screw locked torque
Vo-	M4 7kgf-cm
Vo+	



CFM600S Series

MECHANICAL SPECIFICATION

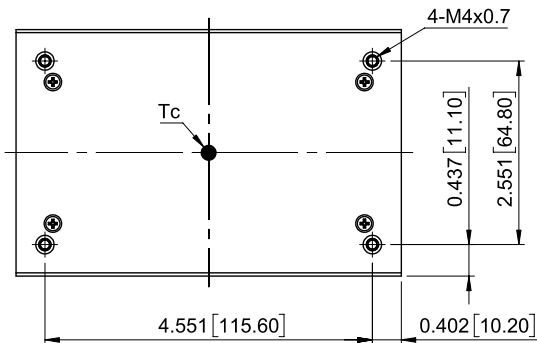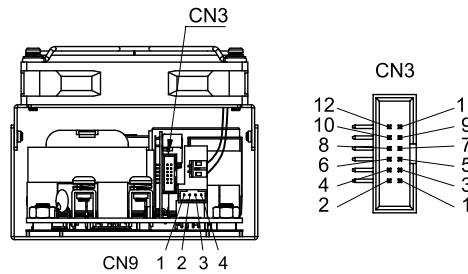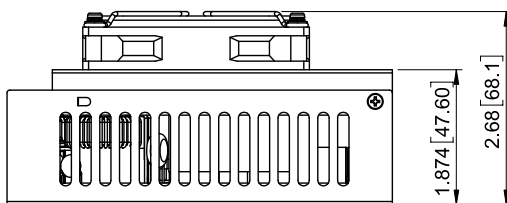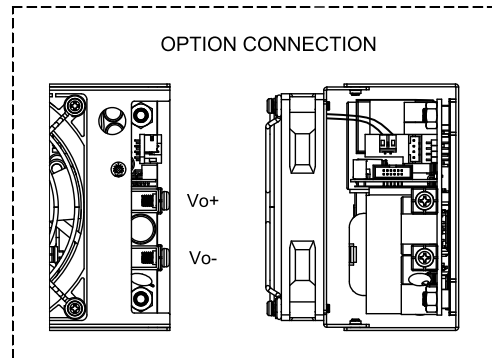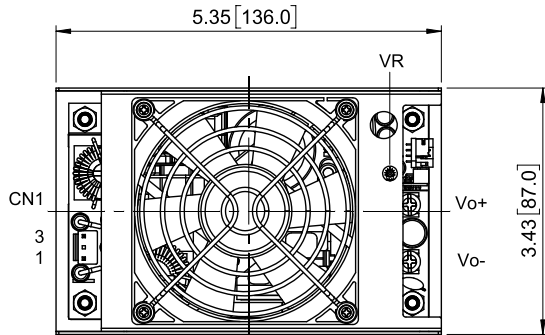

CFM600SXXXF

All Dimensions in Inches[mm]

Tolerance Inches: x.xx=±0.03, x.xxx=±0.020

Millimeters: x.x=±0.7, x.xx=±0.50

AC Input Connector(CN1):JST B2P3-VH or equivalent

Pin	Function	Mating Housing	Terminal
1	ACL	JST VHR-3N or equivalent	JST SVH-41T-P1.1 or equivalent
2	-		
3	ACN		

DC Output Connector(CN9):TKP P110I-04 or equivalent

Pin	Function	Mating Housing	Terminal
1	GND	JST PHR-4 or equivalent	JST SPH-002T-P0.5L or equivalent
2	+5VSB		
3	GND		
4	+12V-FAN		

DC Output Connector(CN3):Townes B304F-12RGF-104-LH or equivalent

Pin	Function	Mating Housing
1	SGND	Samtec FFSD-06-01-N or equivalent
2	NA	
3	NA	
4	NA	
5	NA	
6	NA	
7	PS ON/OFF	
8	GND	
9	PG/PF	
10	PC(Optional)	
11	Vsns-	
12	Vsns+	

DC Output Connector:KANG YANG PCB-58M4 or equivalent

Function	The screw locked torque
Vo-	M4 7kgf-cm
Vo+	

CINCON Electronics Co. Ltd.
 Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan
 Tel: 886-2-27086210
 Fax: 886-2-27029852
 E-mail: sales@cincon.com.tw
 Web: www.cincon.com