



CHB300-300S SERIES 300 WATT 2:1 INPUT ISOLATED DC-DC CONVERTER

Features

- Efficiency Up to 90%
- Fixed Switching Frequency
- Regulated Outputs
- Remote On/Off
- Fully protected (OTP/OCP/OVP/UVLO)
- 3000Vac I/O Isolation
- Operating Case Temperature -40 to +100°C
- Half Brick Size Meet Industrial Standard
2.28x2.40x0.50
- CB Test Certificate IEC60950-1
- UL60950-1(Reinforce Insulation) Approval
- Safety Meets IEC/EN/UL 62368-1
- Shock & Vibration MIL-STD-810F(EN61373) Compliant
- Fire & Smoke EN45545-2 Compliant
- 2000m Operating Altitude
- -55°C Operating Available (Suffix "-M2")



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF. (1)	CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD		
CHB300-300S05	180-425 VDC	5 VDC	0 mA	60 A	10 mA	1125 mA	89	10000uF
CHB300-300S12	180-425 VDC	12 VDC	0 mA	25 A	10 mA	1135 mA	88	10000uF
CHB300-300S24	180-425 VDC	24 VDC	0 mA	12.5 A	10 mA	1110 mA	90	6000uF
CHB300-300S28	180-425 VDC	28 VDC	0 mA	10.7 A	10 mA	1110 mA	90	6000uF
CHB300-300S48	180-425 VDC	48 VDC	0 mA	6.25 A	10 mA	1110 mA	90	3000uF

NOTE:

1. Nominal Input Voltage 300 VDC.
2. Measured at Nominal Input Voltage.
3. An External Input Capacitor 150uF for All Models are Recommended to Reduce Input Ripple Voltage.
4. -55°C Start-up Screen per MIL-STD105E S1 Sampling Procedure for "-M2" Version.

PART NUMBER

Series	Nominal Input Voltage	Number of Outputs	Nominal Output Voltage	Remote On/Off Logic	Mounting Inserts	Operating Case Temp. Range
CHB300-	II	O	XX	L	-Y (Option)	-Z (Option)
CHB300	300 : 300 VDC	S : Single	05 : 05VDC 12 : 12VDC 24 : 24VDC 28 : 28VDC 48 : 48VDC	None : Positive N : Negative	None : M3x0.5 Mounting Inserts -C : Clear Mounting Insert (3.2mm DIA.)	None : -40~100°C -M2 : -55~100°C

Part Number Example:

CHB300-300S12N-C-M2: Half Brick, 300W, 2:1 180-425Vdc Input, Single 12Vdc Output, Negative Logic, Clear Mounting Insert, -55~100°C Operating Case Temp. Range



CHB300-300S Series

TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage	Continuous	All	-0.3		425	V _{dc}
Input Surge Voltage	100ms max.	All			500	V _{dc}
Operating Case Temperature	At the center part of case plate (with Derating) Suffix "-M2" (with Derating)	All -M2	-40 -55		100 100	°C
Storage Temperature		All	-55		125	°C

INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Input Voltage		All	180	300	425	V _{dc}
Input Under Voltage Lockout						
Turn-On Voltage Threshold	Full load	All	165	170	175	V _{dc}
Turn-Off Voltage Threshold	Full load	All	155	160	165	V _{dc}
Lockout Hysteresis Voltage	Full load	All		10		V _{dc}
Maximum Input Current	V _{in} =180V, Full load	All		1.91		A
No-Load Input Current	V _{in} =300V, I _o =0A		See Model Number Table			mA
Input Filter	Pi filter	All				
Inrush Current (I ² t)	As per ETS300 132-2	All			0.1	A ² s
Input Reflected Ripple Current	P-P thru 12uH inductor, 5Hz to 20MHz	All		50		mA

OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Voltage Set Point Accuracy	V _{in} =300V, Full load, T _c =25°C	All	-1.0		+1.0	%
Output Voltage Regulation						
Load Regulation	Full load to no load	All			±0.2	%
Line Regulation	V _{in} =High line to low line, full load	All			±0.2	%
Temperature Coefficient	T _c =-40°C to 100°C	All			±0.02	%/°C
Output Voltage Ripple and Noise (5Hz to 20MHz bandwidth)						
Peak-to-Peak	Full load, 5V: 47uF T521 KO CAP. <55mR and 1uF ceramic capacitor 48V: 10uF aluminum capacitor and 1uF ceramic capacitor Others: 10uF tantalum capacitor and 1uF ceramic capacitor	5Vo			120	mV
		12Vo			150	
		24Vo			240	
		28Vo			280	
		48Vo			480	
RMS.	Full load, 5V: 47uF T521 KO CAP. <55mR and 1uF ceramic capacitor 48V: 10uF aluminum capacitor and 1uF ceramic capacitor Others: 10uF tantalum capacitor and 1uF ceramic capacitor	5Vo			60	mV
		12Vo			60	
		24Vo			120	
		28Vo			150	
		48Vo			200	
Output Current Range	V _{in} = 180 to 425V		See Model Number Table			A
Over Current Protection	Hiccup mode. Auto recovery	All	105	125	140	%
Short Circuit Protection		All	Continuous, Auto Recovery			
External Load Capacitance	Full load (Constant resistive load)		See Model Number Table			uF



CHB300-300S Series

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Trim Range	$P_o \leq \text{max. rated power}$, $I_o \leq I_{o_max}$.	All	-20		+10	%
Output Voltage Remote Sense Range	$P_o \leq \text{max. rated power}$, $I_o \leq I_{o_max}$. % of nominal V_o	All			+10	%
Over Voltage Protection	Limited voltage, % of nominal V_o	All	115	125	140	%

EFFICIENCY

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
100% Load	$V_{in}=300V$, Full load		See Model Number Table			%

DYNAMIC CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Current Transient						
Error Band	75% to 100% of I_{o_max} . step load change $di/dt=0.1A/us$	All			± 5	%
Recovery Time	(within 1% V_{out} nominal)	All			250	us
Turn-On Delay and Rise Time	Full load (Constant resistive load)					
Turn-On Delay Time, From On/Off Control	$V_{on/off}$ to 10% V_{o_set} , Remote on	All		50		ms
Turn-On Delay Time, From Input	V_{in_min} to 10% V_{o_set} , Power up	All		300		ms
Output Voltage Rise Time	10% V_{o_set} to 90% V_{o_set}	All		10		ms

ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Isolation Voltage (100% factory Hi-Pot tested @2sec.)	1 Minute; input to output	All			3000 4200	V_{ac} V_{dc}
	1 Minute; input to case (base plate)	All			2500 3500	V_{ac} V_{dc}
	1 Minute; output to case (base plate)	All			500 700	V_{ac} V_{dc}
Isolation Resistance	Input to output	All	100			$M\Omega$
Isolation Capacitance	Input to output			None		
	Input to case (base plate)	All		None		pF
	Output to case (base plate)			20000		

FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency	Pulse width modulation (PWM), fixed	All	270	300	330	KHz
On/Off Control, Positive Remote On/Off Logic, Refer to -Vin Pin						
Logic Low (Module Off)	$V_{on/off}$ at $I_{on/off}=1.0mA$	-M2 Others	0		1.0 1.2	V
Logic High (Module On)	$V_{on/off}$ at $I_{on/off}=0.0uA$, Pin open=on	All	3.5		75	V
On/Off Control, Negative Remote On/Off Logic, Refer to -Vin Pin						
Logic High (Module Off)	$V_{on/off}$ at $I_{on/off}=0.0uA$, Pin open=off	All	3.5		75	V
Logic Low (Module On)	$V_{on/off}$ at $I_{on/off}=1.0mA$	-M2 Others	0		1.0 1.2	V
On/Off Current (for both remote on/off logic)	$I_{on/off}$ at $V_{on/off}=0V$	All		0.3	1	mA
Leakage Current (for both remote on/off logic)	Logic high, $V_{on/off}=15V$	All			30	uA
Off Converter Input Current	Shutdown input idle current	All		3	5	mA
Over Temperature Shutdown	Temperature at the center part of base plate,	All		105		$^{\circ}C$
Over Temperature Recovery	non-latching	All		95		$^{\circ}C$



CHB300-300S Series

GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	$I_o=100\%$ of I_{o_max} ; MIL-HDBK - 217F_Notice 1, GB, 25°C	Vo=5.0V Vo=12V Others		470 590 760		K hours
Weight		All		90		grams
Case Material	Plastic, DAP, UL 94V-0					
Base plate Material	Aluminum					
Potting Material	UL 94V-0					
Pin Material	Base: Copper Plating: Nickel with Matte Tin					
Shock/Vibration	MIL-STD-810F/EN61373					
Humidity	95% RH max. Non Condensing					
Altitude	2000m Operating Altitude, 12000m Transport Altitude					
Thermal Shock	MIL-STD-810F					
Fire & Smoke	EN45545-2 Compliant					
EMI	Meets EN55032 & EN55022 Compliant (with external filter)					Class A
ESD	EN61000-4-2 Level 3: Air $\pm 8kV$, Contact $\pm 6kV$					Perf. Criteria A
Radiated immunity	EN61000-4-3 Level 3: 80~1000MHz, 20V/m					Perf. Criteria A
Fast Transient	EN61000-4-4 Level 3: On power input port, $\pm 2kV$, external input capacitor required					Perf. Criteria A
Surge	EN61000-4-5 Level 4: Line to earth, $\pm 2kV$, Line to line, $\pm 2kV$					Perf. Criteria A
Conducted immunity	EN61000-4-6 Level 3: 0.15~80MHz, 10V					Perf. Criteria A
Power Frequency Magnetic Field immunity	EN61000-4-8 50/60Hz, 3A/m (r.m.s.)					Perf. Criteria A
Application Note Link	CHB300S-300S Series App Notes					
Packaging Information Link	Packaging Information					

Immunity to Environmental Conditions

Phenomenon	EN50155; 2017 Reference Clause(s)	Reference Standard	Test Conditions	Result
Vibration Test	MIL-STD-810F Table 514.5C-VIII Figure 514.5C-6	MIL-STD-810F	Unit are Non-Operating Vibration Waveform: Random Vibration Frequency: 15 ~ 2000 Hz Vibration axis: X \ Y \ Z axis Duration: 1hr / axis	Pass
Shock Test	MIL-STD-810F 516.5 Table 516.5-I	MIL-STD-810F	Wave form: Sawtooth Wave Test Category: Crash Hazard Test for Ground Equipment Duration: 10 ms Peak Acceleration: 75 G Cross-Over Frequency: 80 Hz No. of Shock: Each axis 3 times Shock Direction: $\pm X$, $\pm Y$, $\pm Z$ axis	Pass
Thermal Shock Cycling Test	MIL-STD-810F 503.4 Figure 503.4-1	MIL-STD-810F	Temperature: -55°C to 105°C Humidity: 95%RH Duration: 8hrs/ 3 times cycling & 4hrs dwell time	Pass
Thermal Humidity Cycling Test	MIL-STD-810F Notice 3 Method 507.4	MIL-STD-810F	Temperature: 60°C to 30°C Humidity: 95%RH Duration: 240 hrs	Pass







CHB300-300S Series

EN45545-2 Fire & Smoke Test Conditions

Item		Standard	Hazard Level
R22	Oxygen Index Test	EN 45545-2: 2013 EN ISO 4589-2: 2006	HL1, HL2, HL3
	Smoke Density Test	EN 45545-2: 2013 EN ISO 5659-2: 2013	HL1, HL2, HL3
	Smoke Toxicity Test	EN 45545-2: 2013 NF X70-100: 2006	HL1, HL2, HL3
R23	Oxygen Index Test	EN 45545-2: 2013 EN ISO 4589-2: 2006	HL1, HL2, HL3
	Smoke Density Test	EN 45545-2: 2013 EN ISO 5659-2: 2013	HL1, HL2, HL3
	Smoke Toxicity Test	EN 45545-2: 2013 NF X70-100: 2006	HL1, HL2, HL3
R24	Oxygen Index Test	EN45545-2: 2013 EN ISO 4589-2	HL1, HL2, HL3
R25	Glow - Wire Test	EN 45545-2:2013 EN 60695-2-11:2001	HL1, HL2, HL3
R26	Vertical Flame Test	EN 45545-2: 2013 EN 60695-11-10: 2013	HL1, HL2, HL3

CHARACTERISTIC CURVE


Power Derating Curve

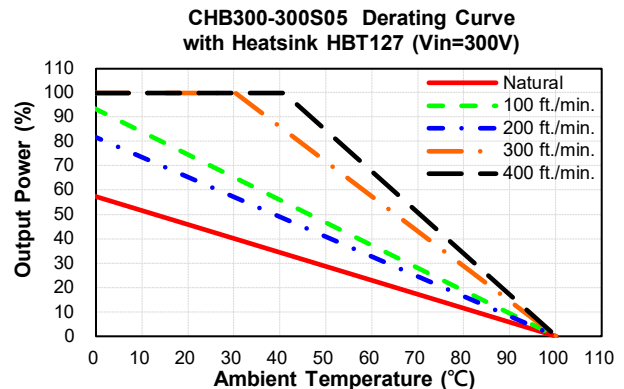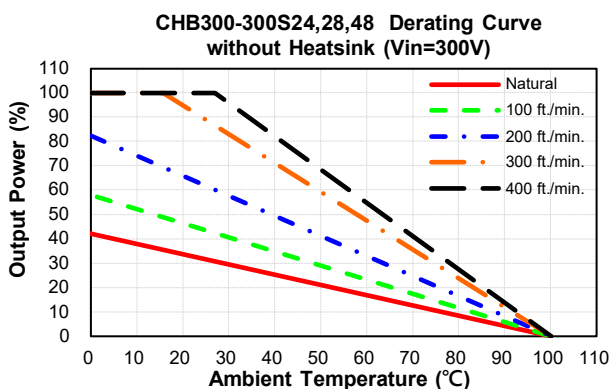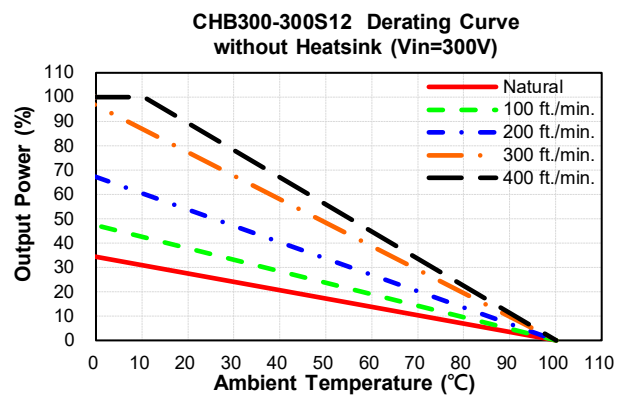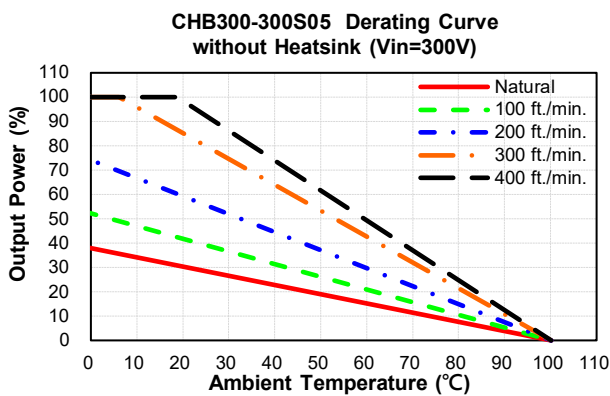




CHB300-300S Series


CHB300-300S12 Derating Curve with Heatsink HBT127 (Vin=300V)

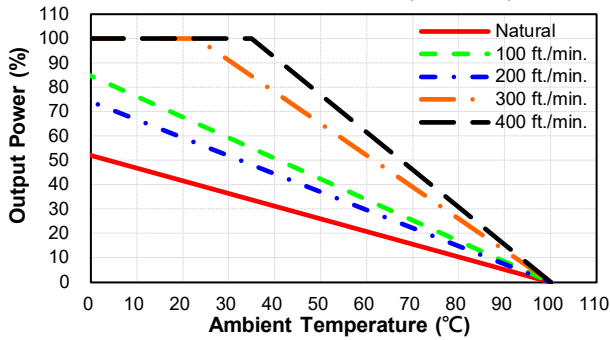


CHB300-300S24,28,48 Derating Curve with Heatsink HBT127 (Vin=300V)

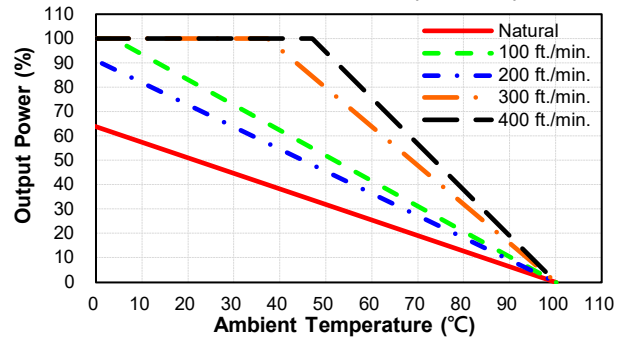


CHB300-300S05 Derating Curve with Heatsink HBT254 (Vin=300V)

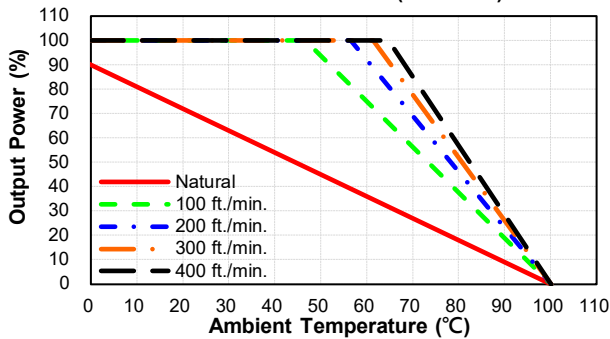

CHB300-300S12 Derating Curve with Heatsink HBT254 (Vin=300V)

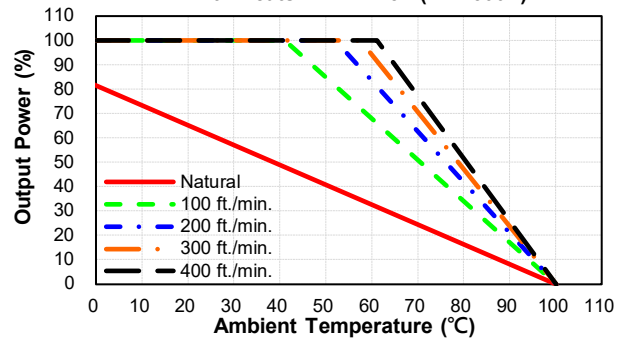

CHB300-300S24,28,48 Derating Curve with Heatsink HBT254 (Vin=300V)

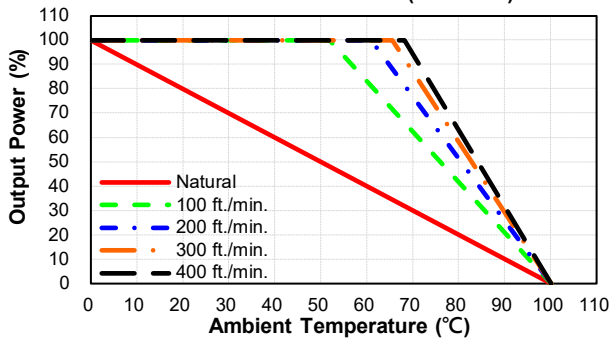





CHB300-300S Series

Performance Data


CHB300-300S05
Eff Vs Io @25 Deg. C

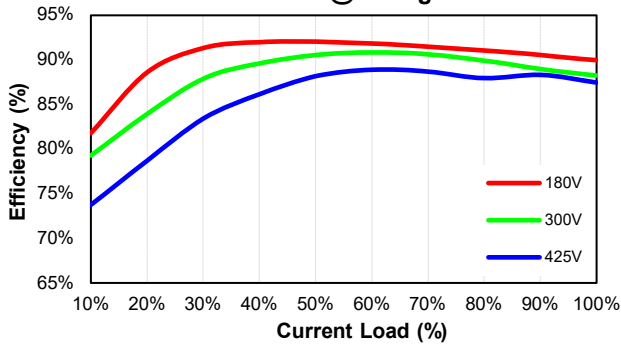


CHB300-300S05
Pd Vs Po @25 Deg. C

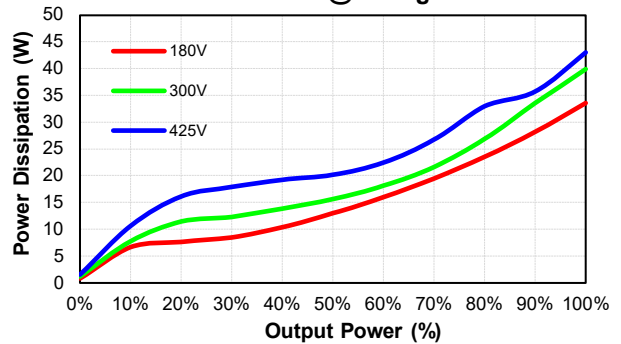


CHB300-300S12
Eff Vs Io @25 Deg. C

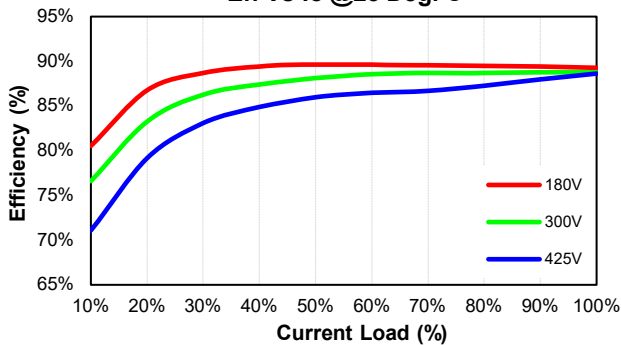


CHB300-300S12
Pd Vs Po @25 Deg. C

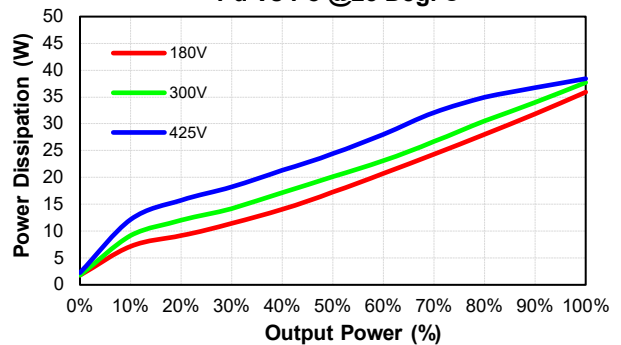


CHB300-300S24
Eff Vs Io @25 Deg. C

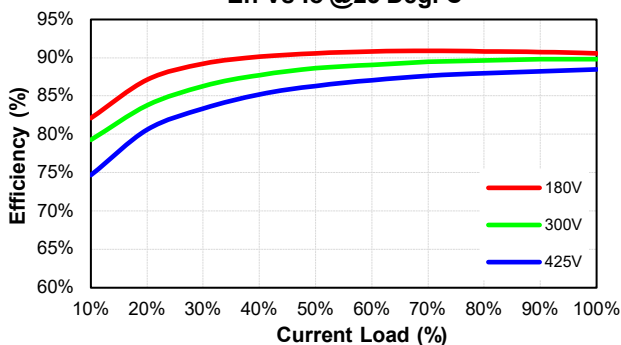


CHB300-300S24
Pd Vs Po @25 Deg. C

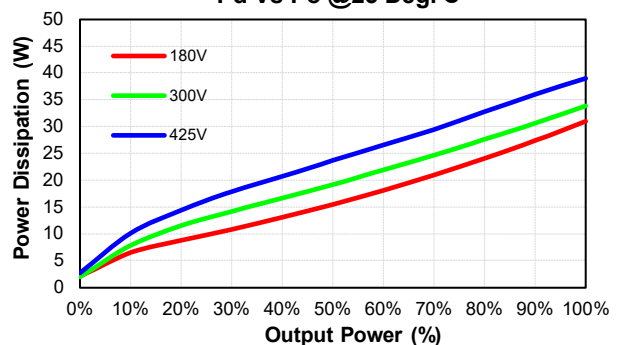

CHB300-300S28
Eff Vs Io @25 Deg. C

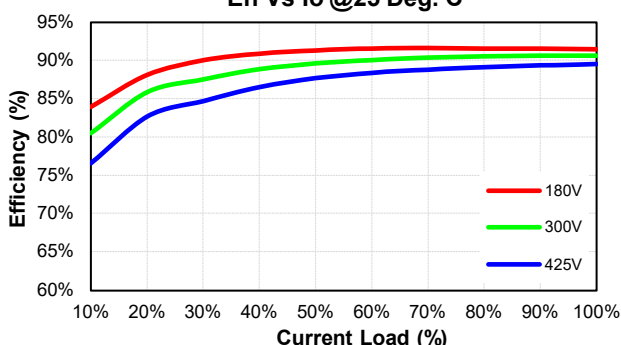


CHB300-300S28
Pd Vs Po @25 Deg. C

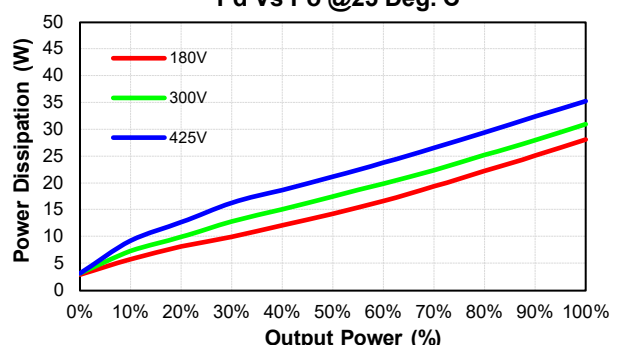




CHB300-300S Series



CHB300-300S48
Eff Vs Io @25 Deg. C

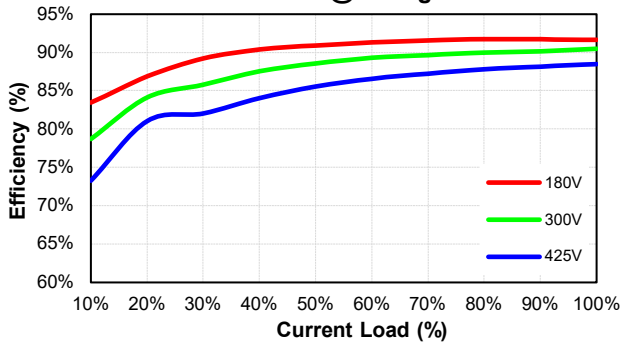

CHB300-300S48
Pd Vs Po @25 Deg. C

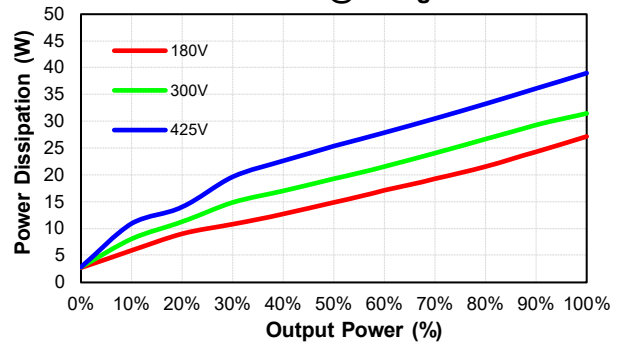

MECHANICAL SPECIFICATION

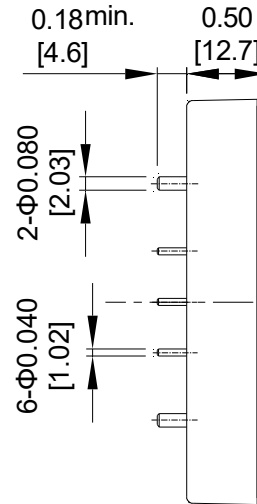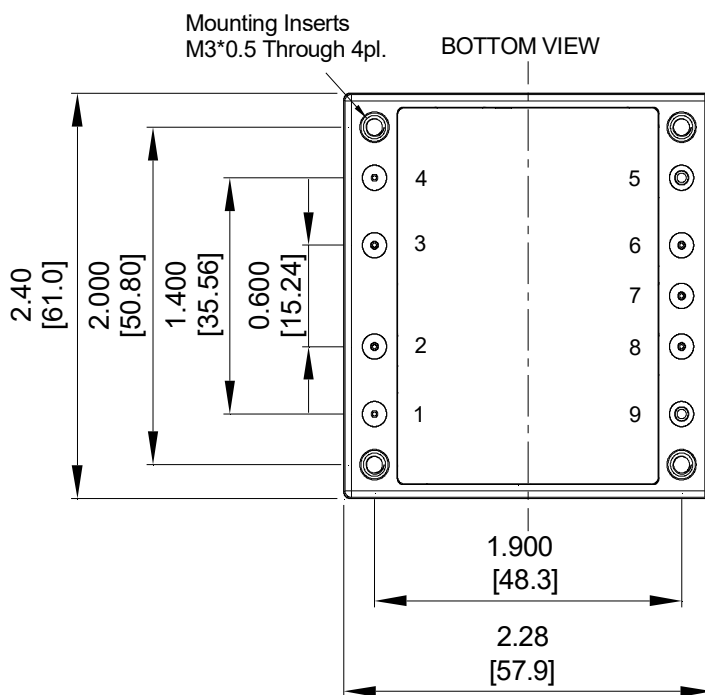

Pin	Function
1	+V Input
2	On/Off
3	NP
4	-V Input
5	-V Output
6	-Sense
7	Trim
8	+Sense
9	+V Output

CASE HB

All Dimensions In Inches(mm)

Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010

Millimeters: X.X= ±0.5 , X.XX=±0.25

CINCON Electronics Co. Ltd.
 Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan
 Tel: 886-2-27086210
 Fax: 886-2-27029852
 E-mail: sales@cincon.com.tw
 Web: www.cincon.com